GB

1025

· NoFs

DEPARTMENT OF THE INTERIOR UNITED STATES GEOLOGICAL SURVEY

CHARLES D. WALCOTT, DIRECTOR

PRELIMINARY REPORT

ON THE

GEOLOGY AND UNDERGROUND WATERS OF THE ROSWELL ARTESIAN AREA NEW MEXICO

BY

CASSIUS A. FISHER




WASHINGTON
GOVERNMENT PRINTING OFFICE
1906







Class G B 1025

Book 1 1 6 F 5

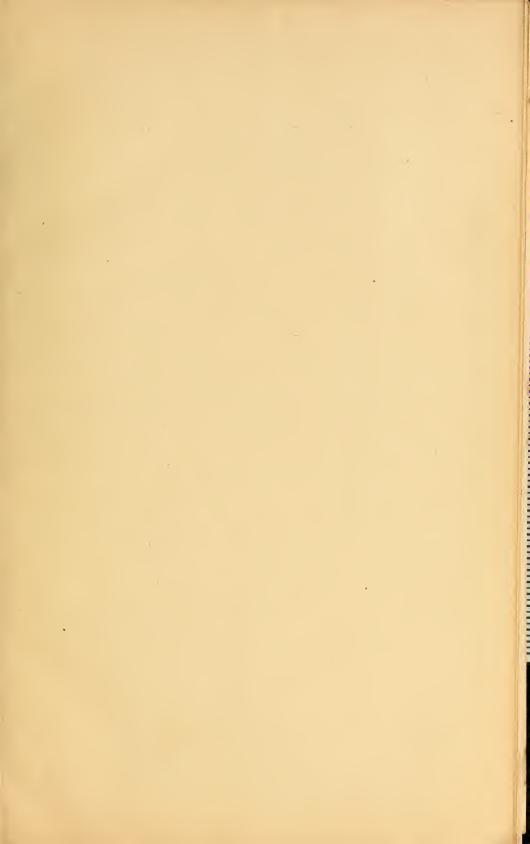

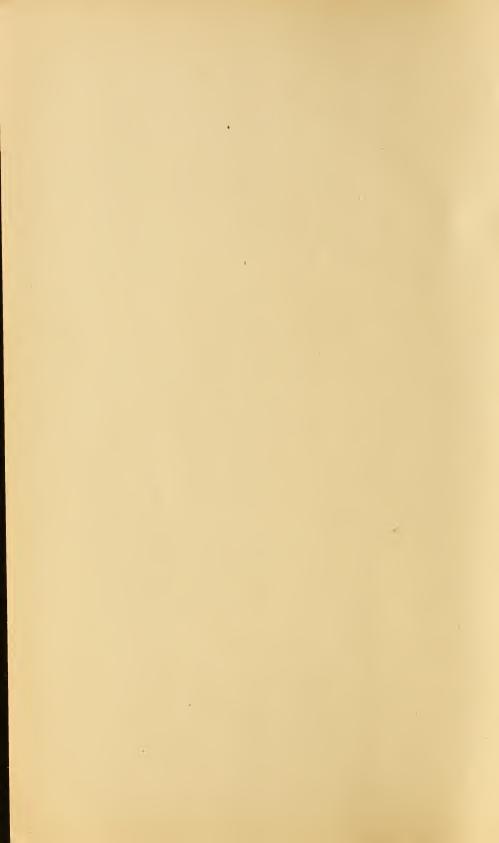



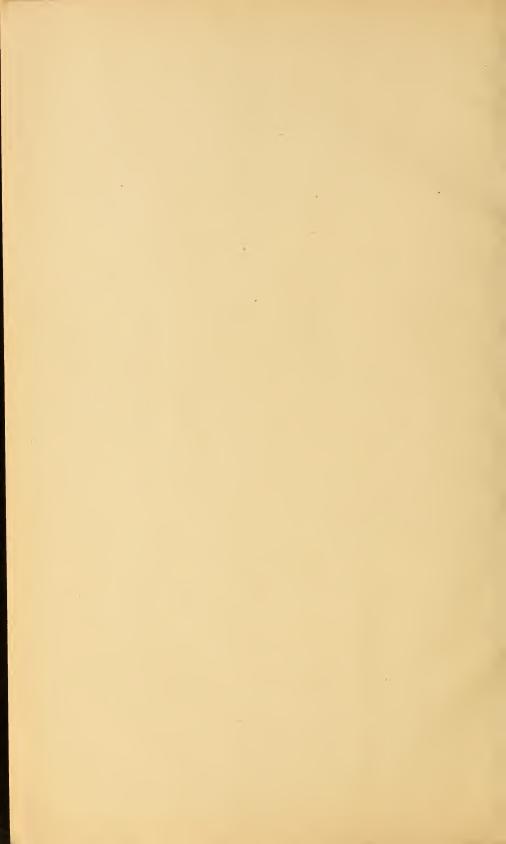

17/382

Water-Supply and Irrigation Paper No. 158

Series { B, Descriptive Geology, 88 0, Underground Waters, 54

DEPARTMENT OF THE INTERIOR

UNITED STATES GEOLOGICAL SURVEY

CHARLES D. WALCOTT, DIRECTOR

539

PRELIMINARY REPORT

ON THE

GEOLOGY AND UNDERGROUND WATERS OF THE ROSWELL ARTESIAN AREA NEW MEXICO

BY

CASSIUS A. FISHER



WASHINGTON
GOVERNMENT PRINTING OFFICE

1906 Copy2

Contract of the contract of th

AUG 30 1906 D. of D.


g.c. 3. 9/4/06.


CONTENTS.

	rage.
Introduction	5
Topography	5
Relief	5
Drainage	5
Lakes	6
Outline of geologic relations	6
General statements	6
Permian (?) series	6
Red-bed division	6
Limestone division	7
Cretaceous (?) system	8
Quaternary system	8
Alluvium	8
Unconsolidated deposits.	9
Artesian water horizons	9
Extent of artesian area.	9
Wells and well prospects in Roswell artesian basin.	10
General condition	10
Chaves County.	10
Roswell district	10
Hagerman district	13
Eddy County	15
Artesia district	15
McMillan district	18
Pressure of artesian water	20
Composition of artesian water.	21
Origin of the artesian water	23
Amount of artesian water	24
Waste of water.	25
Shallow wells.	25
Irrigation.	26
Roswell system.	26
Northern canal.	26
Hondo project	27
Artesian irrigation.	27
Climate	28
Temperature	28
Rainfall.	28
Agriculture	29

ILLUSTRATIONS.

,	Page.
PLATE I. Map showing general location of the Roswell artesian area.	5
II. A, Head of North Spring River; B, Head of South Spring River	6
III. A, View of "Bottomless Lakes," east of Pecos River; B, Artesian well and	
	6
reservoir east of South Spring, New Mexico. IV. Reconnaissance geologic map of the Roswell artesian basin.	8
V. Geologic sections across the Roswell artesian basin.	8
VI. Map of the Roswell artesian basin.	10
VII. A, Rasmussen's well, east of South Springs, New Mexico; B, Widdeman's	
	14
well, near Dexter, N. Mex. VIII. A, Artesian town well, at Artesia, N. Mex.; B, Sherman's pumping plant,	
near Roswell, N. Mex.	16
IX. Map of southeastern New Mexico, showing the general artesian conditions	
of the Roswell basin.	24

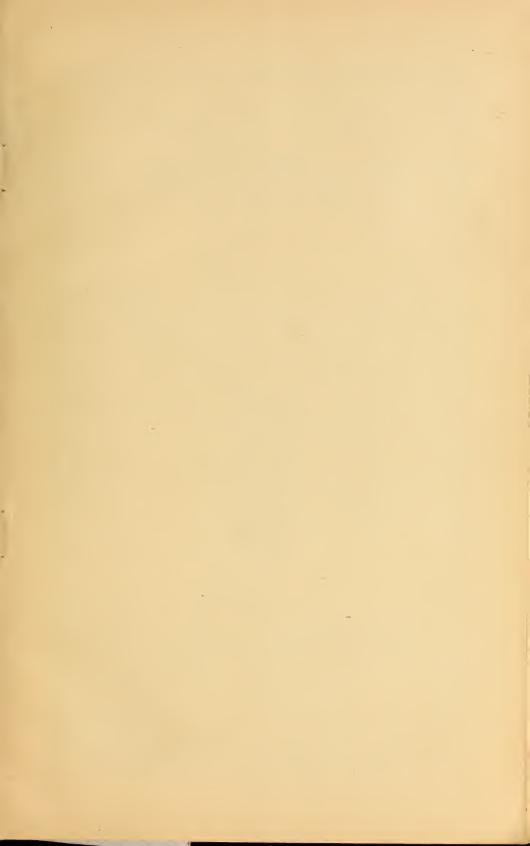

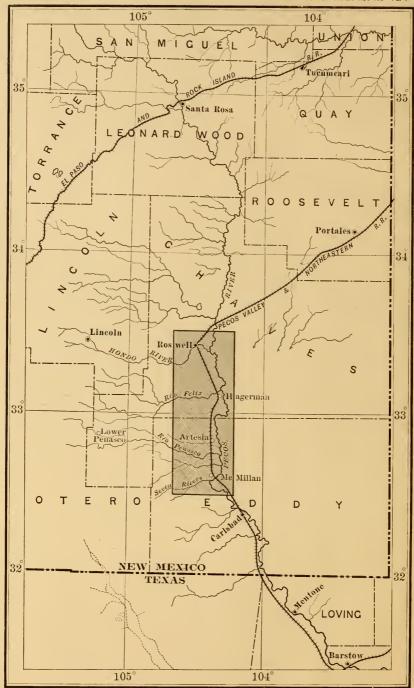

MAP SHOWING GENERAL LOCATION OF THE ROSWELL ARTESIAN AREA.

PRELIMINARY REPORT ON THE GEOLOGY AND UNDERGROUND WATERS OF THE ROSWELL ARTESIAN AREA, NEW MEXICO.

By Cassius A. Fisher.

INTRODUCTION.

The area to which this report relates is located in southeastern New Mexico. It comprises about 1,800 square miles lying along Pecos River and extending from a point 5 miles north of Roswell to below the mouth of Seven Rivers, as shown in Pl. I. In addition to the discussion of the artesian waters, the report includes a brief description of the geology of the sedimentary rocks, their structure, and their relation to the underground waters. The area of flowing wells is indicated on the map, Pl. VI, and records of representative wells are given, which are intended to illustrate the character and succession of the water-bearing beds) Information respecting surface waters available for domestic and irrigation purposes and a brief description of the climatic and agricultural features of the region are also given.

The investigation was conducted under the direction of Mr. N. H. Darton.

The writer was assisted in the field by Messrs. E. M. Mitchell and E. Patterson, and these gentlemen obtained a portion of the well data upon which this report is based. The systematic measurement of well pressures was carried on under the direction of Mr. W. M. Reed, district engineer of the Reclamation Service, who has done much to promote the work. The chemical analyses of the surface and artesian waters have been kindly furnished by Mr. E. M. Skeats, of El Paso, Tex., and the paleontological collections have been examined by Dr. G. H. Girty. I am indebted to Messrs. Hagerman, Goodart, Phillips, Hortenstein, Spurlock, Hale, and others for information concerning artesian irrigation.

An excellent report on the soils of the Roswell basin by Messrs. T. H. Means and F. D. Gardner was used in the preparation of this report.

TOPOGRAPHY.

Relief.—The topographic features of the Roswell basin present little variety. Across the east side of the district there are irregular bluffs rising 200 to 300 feet above Pecos River, while to the west the surface rises gradually toward the high limestone plateau bordering the Capitan, Sierra Blanca, and Sacramento mountains. The region has an average elevation of 3,600 feet above sea level. The highest portion is along the west side of the district, where the altitude is about 4,000 feet. In the southeast corner the altitude is about 3,200 feet. Near the junction of the North and South forks of Seven Rivers there is a high bluff having a north-facing escarpment, which rises high above the valley of the South Fork, and on the north side of Eagle Draw is a small but prominent plateau.

Drainage.—The principal drainage channel is Pecos River, which enters from the north and flows in a southerly direction across the district. The flow is not large, but it carries a small amount of water during the entire year. There are a number of tributaries from the west, the largest being the Hondo, Felix, Penasco, and Seven rivers. Hondo and Penasco rivers, perennial streams throughout their upper courses, have their sources high on the

slopes of the Capitan, Sierra Blanca, and Sacramento mountains. The Felix and Seven rivers rise in the limestone plateaus lower down, and drain a much smaller area. Hondo River east of Roswell is joined on the north by North Spring and Berrendo rivers, and on the south side near its mouth by South Spring River. These streams are fed by springs, and they carry abundant water at all seasons. There are also several small intermittent streams which enter Pecos River. Those from the west are Gardners Arroyo, Fourmile Creek, Eagle Draw, Cottonwood Creek, Walnut Draw, and Zuber Hollow; those from the east are Comanche Draw and Long Arroyo.

Lakes.—At the heads of North and South Spring rivers and Middle and South Berrendo rivers are lakes of moderate size. These lakes are fed by a number of small springs, which derive their water mainly from the unconsolidated deposits underlying Hondo, Blackwater, and Eden valleys. Water rises to the surface in the lower courses of Felix River, Cottonwood Creek, Penasco River, Gardners Arroyo, and North and South Forks of Seven Rivers. In the vicinity of Lake Arthur, Hagerman, Greenfield, and Dexter, and north along the east side of the Northern canal there are lakes fed in part by springs and in part by seepage from the Northern canal.

On the east side of Pecos River, about 12 miles southeast of Roswell, are several deep lakes lying along the base of the gypsum bluffs, which are locally known as the "Bottomless Lakes." Dimmit Lake, the largest of these, is situated at the head of a short ravine about $2\frac{1}{2}$ miles from Pecos River. Near the mouth of this ravine, on the north side, is Dee Lake, and along the base of the bluffs for some distance to the north several smaller lakes occur. The location of these lakes is shown on the geologic map, Pl. IV. They have probably been formed by flood water from the high slopes to the east, which, in flowing over the exposed gypsum ledges at the edge of the bluffs, has dissolved the gypsum and formed subterranean passages that now extend to some of the shallow artesian flows in Pecos Valley. A view of one of the "Bottomless Lakes" is shown in Pl. III, A. The water from some of these lakes is used for irrigation.

OUTLINE OF GEOLOGIC RELATIONS.

GENERAL STATEMENTS.

The rocks of the district comprise limestone, sandstone, clay, and gypsum which are believed to be of Permian age. Overlying these deposits throughout the Roswell basin are extensive sheets of sand, gravel, clay, and silt, probably of Quaternary age, which have been deposited in successive terraces between Pecos River and the high limestone slopes to the west. The so-called Permian series of this district consists of an upper red bed member of gypsum, red sand, limestone, and clay 600 to 800 feet thick, forming the high bluffs along the east side of Pecos River and underlying the recent deposits of Pecos Valley, and a lower member of massive limestone, clay, and gypsum of undetermined thickness, which constitutes high rugged slopes to the west. Overlying the red-bed division east of Pecos River is a reddish-brown sandstone about 100 feet thick, which may be of Cretaceous age. No subdivisions have been made of the probably Permian rocks in this region in the present reconnaissance.

PERMIAN (?) SERIES.

Red-bed division.—These rocks consist of alternating beds of gypsum, red sand, and clay, with an occasional layer of dark-gray, compact limestone. The gypsum predominates and usually occurs in beds about 10 feet thick. It is often found, however, in thinner layers, interbedded with clay and limestone. The red beds are provisionally placed in the Permian, although no fossils have been found in them. They are not shown separately on the geologic map (Pl. IV), but are represented with the underlying massive limestones. The upper part of the beds is well exposed in the bluffs along the east side of Pecos River, where a number of sections have been measured. These sections are as follows:



A. HEAD OF NORTH SPRING RIVER.



B. HEAD OF SOUTH SPRING RIVER.





A. VIEW OF "BOTTOMLESS LAKES," EAST OF PECOS RIVER.



B. ARTESIAN WELL AND RESERVOIR EAST OF SOUTH SPRING, NEW MEXICO.



Sections of gypsum bluffs along the east side of Pecos River, New Mexico.

n	Dank
East of Roswell:	Feet.
Alternating layers of gypsum and red sand, with an occasional layer of limestone	
White gypsum	
Red sand	
White, thin-bedded gypsum	
Red sandstone containing thin layers of limestone	
White gypsum	5
Red sand	13
Gypsum	10
Red sand	3
Gypsum	8
Red sand	8
Gypsum	
Greenish-gray sandstone	
Gypsum	
· · · · · · · · · · · · · · · · · · ·	
Total	178
At Dimmit Lake:	
Gray, sandy limestone	20
Alternating layers of gypsum and red and green clay, with an occasional bed of porous lime-	
stone	100
Gypsum	4
Red clay.	$2\frac{1}{2}$
Gypsum.	18
Alternating layers of gypsum and red clay.	
Gypsum	
Alternating layers of gypsum and red sandstone	
Gypsum.	
Red clay.	
Gypsum.	
Alternating layers of gypsum and red clay.	
Gypsum	
Red clay.	_
Gypsum	10
Red clay.	
Alternating layers of gypsum and red clay	8
Gypsum	
Red clay, with thin layers of gypsum	
Gypsum	6
Total	249
Eight miles northeast of Artesia:	249
	-
Gray, compact limestone.	5
Gypsum and red, sandy clay in alternate succession	
Red, sandy clay	
White, massive gypsum.	15
Red, sandy clay	
White gypsum	10
Gray limestone	
Gypsum	18
Red clay.	12
Gypsum	5
(Model)	150
Total	150
About 2 miles southeast of the mouth of South Fork of Seven Rivers:	0.7
Massive, gray limestone.	35
Gypsum and red sandstone in alternate layers, with an occasional limestone ledge	50
Gypsum, thin-bedded porous limestone, and red sandstone arranged alternately, the gyp-	
sum predominating.	
Gypsum, with thin layers of gray limestone	50
Total	285

Limestone division.—The massive limestone beds underlying the so-called Permian red beds of this region consist mainly of gray, compact limestone, with layers of soft sandstone, clay, and gypsum. In the upper part the limestone is more or less thin-bedded and

porous, and contains many sandy layers. From these beds some of the strongest artesian flows in the Roswell basin are obtained. Limestone outcrops along the west side of the district, and farther to the west forms high rugged plateaus, extending toward the mountains. Fossils are not abundant in the formation, but in one locality northwest of Roswell a number were collected, which consisted mainly of *Schizodus* and *Pleurophorus*, preserved as casts. According to Doctor Girty the fauna and lithology of these specimens suggest the highest Carboniferous beds or the Permian of the Mississippi Valley in Texas.

To the east of the Roswell district the high plains are traversed by dikes of igneous rock. One of these dikes extends into the area in the northeast corner, but passes beneath the surface at a point about 5 miles east of Pecos River. Its location is shown on the geologic map (Pl. IV). The dike is about 35 feet wide, and consists of a light-colored rock, which is much decomposed on the surface.

Extending across the southeast portion of the area, from below Lake McMillan to the high bluffs east of Artesia, is a narrow zone in which the sedimentary rocks are more or less metamorphosed, so that in the crevices considerable mineralization has taken place. Copper is the principal mineral, occurring mainly as the carbonate and oxide. Some prospecting has been done in the hills south and east of Artesia, but no paying ore has been discovered.

CRETACEOUS (?) SYSTEM.

The sandstone overlying the Permian (?) red beds along the east side of the district is possibly, as above stated, of Cretaceous age. A few fossil plants were found in these beds, but they were too fragmentary to be determined. The distribution of the formation was not ascertained. It consists of massive, reddish-brown sandstone in beds of varying thickness, with an occasional layer of light-gray sandstone. The material is coarse grained and cross-bedded throughout, and often weathers into rounded forms. The following is a section of the sandstone near Petty's windmill, about 15 miles northeast of Roswell:

Section of sandstone overlying Permian (?) red beds near Roswell, N. Mex.

	Feet.
Reddish-brown, cross-bedded sandstone.	40
Brown, massive sandstone	6
Lighter brown, massive sandstone, somewhat cross-bedded	
Gray, coarse-grained sandstone.	1
Reddish-brown sandstone	

QUATERNARY SYSTEM.

The formations of the Quaternary period cover an extensive area in the Roswell basin, comprising approximately 1,200 square miles. They occupy the entire central portion of the basin, and extend far up the limestone slopes to the west. These deposits are mainly of two kinds—the alluvium of the river valleys and the unconsolidated material of higher levels.

Alluvium.—The alluvium is confined mainly to Pecos River Valley, although small areas occur along all the larger and many of the smaller streams. It is a light-colored, fine-grained material, consisting mainly of sand, gravel, and clay, with a small amount of organic matter. In the lower portions of the valley the soil contains much "alkali," often sufficient to render it unfit for cultivation. There are many small lakes along the river bottom, and the lowlands are generally swampy. On the east side of Pecos River, from a point opposite Dexter to beyond Comanche Draw, there are several springs, which have built cones of spring deposits 6 to 10 feet high.

Hondo, Felix, and Penasco rivers have built small flood plains along their lower courses which are perceptibly higher than the surrounding region. The alluvium along these streams varies somewhat in character, but it is generally of a light-gray color, and consists of gravel, sand, silt, and clay, covered by a fertile soil. The fertility is due to the presence of fine silt brought down by the flood waters from the high mountain regions. According



LEGEND

Alluvium (Sand and clay)


Older unconsolidated deposits (Sand, clay, gravel, and conglomerate)

Massive limestone, sandstone, clay, and gypsum

Igneous rock

RECONNAISSANCE GEOLOGIC MAP OF THE ROSWELL ARTESIAN BASIN, SOUTHEASTERN NEW MEXICO BY C.A. FISHER Topography compiled from railroad data and barometer readings Scale Scale Government of Scale Contour interval 100 feet



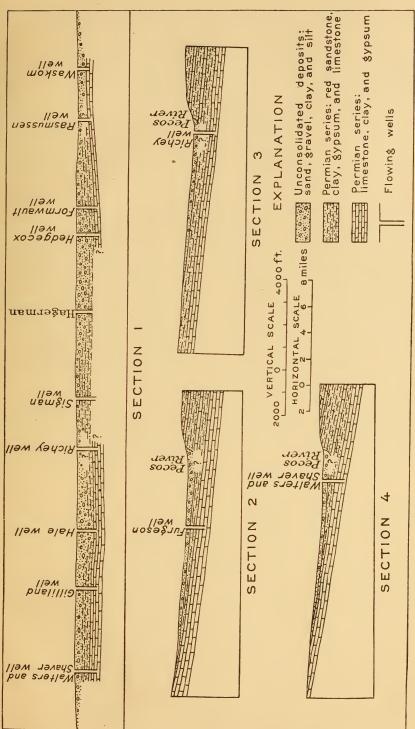

GEOLOGIC SECTIONS ACROSS THE ROSWELL ARTESIAN BASIN.



to Mr. T. H. Means the alluvium of Hondo Valley contains more plant food than that of the Nile in Egypt. The following analyses are taken from Mr. Means's report: a

Constituent.	Hondo mud (Skeats).	Nile mud (Mac- kenzie).	Constituent.	Hondo mud (Skeats).	Nile mud (Mac- kenzie).
Insoluble matter and silica Iron oxide and alumina	43. 6 21. 4	58, 17 24, 75	SodaSulphuric acid.		. 62
Oxide of manganese		.09	Phosphoric acid	. 3	. 20
MagnesiaLime		2. 42 3. 31	Carbonic acid		1. 55 8. 00
Potash	1. 19	. 68	Nitrogen in organic matter	. 32	.12

Unconsolidated deposits.—These deposits consist mainly of sand, gravel, and clay. The sand is of light-gray color, medium to fine grained, the clay more or less sandy, and the gravel a moderately coarse variety. The gravel is often firmly cemented by calcium carbonate, and local deposits of gypsum and a calcareous material known as "caliche" occur throughout the formation. According to well records the thickness of the formation varies considerably in different parts of the basin. In several deep wells around Artesia coarse gravels were encountered 500 to 700 feet below the surface. At Roswell and in the lower part of Hondo Valley unconsolidated sediments are 150 to 300 feet thick, and in Seven Rivers Valley they are probably thicker. In John Richey's well, 8 miles northeast of Artesia, a gravel bed, apparently the base of the unconsolidated sediments, was penetrated at a depth of 134 feet. At Sigman's well, near Lake Arthur, according to the driller's statement, the unconsolidated deposits are only a few feet thick, and about 3 miles northeast of Lake Arthur the red, sandy beds of the Permian (?) are exposed.

ARTESIAN WATER HORIZONS.

There are several artesian horizons in the formations underlying the Roswell basin. Flows of moderate volume are found in the sandstones of the upper member of the Permian (?) series and in the overlying unconsolidated deposits, but the strongest are from porous limestones interstratified with beds of sand, which constitute the upper part of the massive limestone division.

EXTENT OF ARTESIAN AREA.

The Roswell artesian basin is about 60 miles long and has an average width of 11 miles. At the north end it is relatively narrow, but to the south it widens somewhat. It comprises about 650 square miles, the greater part of which lies along the west side of Pecos River. The area of flow is shown on Pl. VI.

In the vicinity of Roswell the head of artesian water, as determined both by practical tests and by the pressures of a number of flows in the town of Roswell, is sufficient to raise water to an altitude of 3,586 feet above sea level, the exact elevation of the water level in the head of North Spring River. In order to ascertain the western limit of the area of flow south of Roswell a line of levels was surveyed, under the direction of Mr. W. M. Reed, district engineer, from the head of North Spring River as far south as Eagle Draw. From there to Seven Rivers the western boundary of the artesian basin was ascertained mainly from evidence of wells in the adjoining lowlands. It is possible that the artesian head increases to the west and that flows might be obtained higher up the slopes than is indicated on the artesian water sheet, especially in the valleys of Felix River, Cottonwood Creek, and Penasco River, but there appears to be no definite evidence of this. The eastern limits of the artesian area

^a Means, T. H. and Gardner, F. D., Soil survey in the Pecos Valley: Field operations of Bureau of Soils, 1899, U. S. Dept. Agric., Rept. No. 64 1900, p. 49.

are indicated by moderately high bluffs, which follow the general course of Pecos River across the entire district.

About 15 miles northeast of Roswell on the south side of Salt Creek are a number of springs that furnish considerable water. It is possible that shallow flowing wells would be obtained in the lowlands of Salt Creek Valley below these springs, but no investigation was made of this region. At Stockpens, about 13 miles northwest of Roswell and a short distance south of the mouth of Salt Creek, a deep test well was being sunk at the time this investigation was made. The boring had reached a depth of 900 feet without obtaining a flow, but it was the intention of the well owners to continue to a depth of 1,000 feet. The head of artesian water in the northern part of the Roswell basin, as calculated from the pressures of flows in the vicinity of Roswell, is not sufficient to bring water to the surface in wells at Stockpens.

There is a deep well at Portales, N. Mex., in which a flow was obtained at a depth of about 400 feet. A record of this well is as follows:

Record of well at Portales, N. Mex.

	Feet.
Soil	
Gypsum.	4- 8
Red, sandy elay.	8- 20
White limestone	20- 32
Red, sandy clay.	32- 48
White limestone	48- 88
Red clay	88-188
"Flint rock".	188-189
Coarse gravel and sand	189-219
Red clay	
White sandstone.	
White sand and clay in alternate layers.	309-399

WELLS AND WELL PROSPECTS IN ROSWELL ARTESIAN BASIN.

GENERAL CONDITIONS.


Flowing wells were first obtained in the Roswell basin about ten years ago and for a number of years thereafter development was confined chiefly to this immediate vicinity. During the last two years, however, strong flows have been obtained near Artesia, and at present this part of the basin is receiving the greatest development. Owing to the rapid progress in well sinking throughout the Roswell basin it is difficult to give a complete list of the flowing wells. Information of about 200 has been obtained, but it is probable that the total number at present exceeds 250. About half of this number are found in Roswell and North Spring River Valley, the extreme north end of the basin.

In amount of flow the wells vary from a few gallons to 1,800 gallons a minute, differing principally with the locality. At Roswell the flow of an average well has been variously estimated at 500 to 700 gallons, while near Artesia the highest flow recorded exceeds 1,700 gallons. The water is used chiefly for irrigation and domestic purposes. In a few cases, however, the presence of sulphur renders it unfit for household use. The Formwaltz well northeast of Hagerman is said to have medicinal properties, but no chemical analysis of the water was obtained.

As the conditions under which artesian water is obtained throughout the Roswell basin show considerable variation, the area in the following discussion is divided into four districts—Roswell, Hagerman, Artesia, and McMillan. The Roswell and Hagerman districts are in Chaves County, and the Artesia and McMillan districts are in Eddy County.

CHAVES COUNTY.

Roswell district.—This district comprises the northern portion of the area of flow included in Chaves County, and, as stated above, it is the district where greatest development has taken place. In Roswell and in Hondo Valley the depths of the wells vary from 150 to 500 feet, the average being 250 feet. To the southeast in the vicinity of Orchard Park flows are

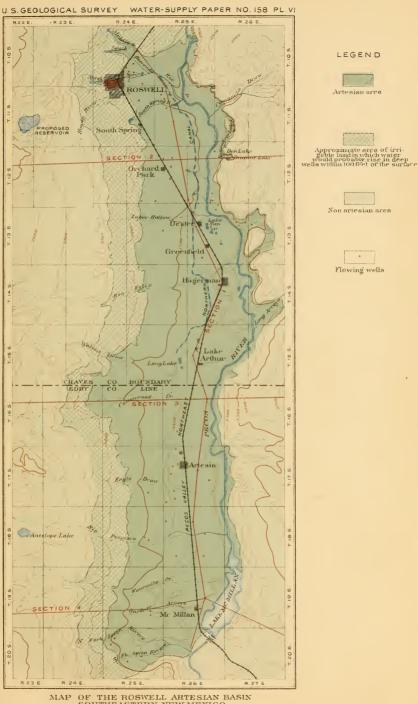

LEGEND

Artesian area

Non artesian area

Flowing wells

OF THE ROSWELL ARTESIAN BASIN SOUTHEASTERN NEW MEXICO BY CAFISHER

Topography compiled from rainboad data and bumonter readings

Scale

Q 3 10 00 feet

Contour interval 100 feet



obtained at a much greater depth. The formations encountered in sinking a well at Roswell generally consist of unconsolidated deposits for the first 175 feet from the surface. Below this depth drills penetrate bed rock, composed of hard, light-colored limestone underlain by alternating layers of porous limestone and sandstone. The following are records of representative wells in and near Roswell:

Typical well records in and near Roswell, N. Mex.

Record of the Ogle well at Roswell:	Feet.
Soil	0- 5
Gravel	5- 30
Blueish clay with layers of gravel.	30-150
Greenish-yellow clay with rust-colored bands.	150-162
Soft red sandstone (water bearing)	162-170
Red clay	170-174
Gray limestone	174-177
Red clay.	177-178
Gray limestone	178-182
Gray limestone, very hard	182-186
Soft gray limestone.	186-204
Hard gray limestone	
Light-gray, porous limestone (water bearing).	218-226
Limestone and sandstone in alternate layers (water bearing)	226-242
Record of the Waskom well, SW. ¼ sec. 32, T. 10 S., R. 25 E.: a	
Soil	0- 5
Sand and gravel	5- 15
Yellow clay	15- 40
Clay and decomposed gypsum.	
Sandstone, coarse yellow sand, and gravel in alternate succession	
Limestone and sandstone in alternating layers, the limestones predominating	360-560
Record of the Rasmussen well, SW. 4 sec. 21, T. 11 S., R. 25 E.:	
Soil and fine sand	0- 30
Gray sand	30- 40
Gravel	40- 50
Rock and gravel in alternate layers	50- 60
Red sand	60- 65
Gray sand and hard rock in thin layers	
Quicksand	
Red sandstone.	
Red sand containing layers of rock.	
Limestone	400-560

Partial list of artesian wells in Roswell district, New Mexico.

Name of owner and location.	Depth.	Diame- ter.	Yield b
Anderson:	Feet.	Inches.	Galls. per minute.
SE. 4 sec. 3, T. 11 S., R. 25 E.	60	6	
Do	60	6	
Do	58	6	
Anderson & Skillman, lot 7, block 16, West Roswell	440	4	400
"Bottomless Lake" well, SE. $\frac{1}{4}$ NW. $\frac{1}{4}$ sec. 10, T. 12 S., R. 26 E	420	6	
Bradley & Beal, lot 6, block 53, West Roswell	232	$5\frac{5}{8}$	600
Brink, Fritz, lot 14, block 23, west side Roswell	235	$5\frac{5}{8}$	500
Brown & Creighton, lot 11, block 4, original Roswell	238	5_{8}^{5}	500
Cahoon, E. A.:			
NW. ¼ NW. ¼ sec. 34, T. 10 S., R. 24 E.	340	$4\frac{1}{2}$	402
Lot 6, block 21, west side Roswell	229	4	250
Chambers, R. M., lot 4, block 24, original Roswell.		45/8	600
Champion, D., NW. ¹ / ₄ NW. ¹ / ₄ sec. 27, T. 10 S., R. 24 E.	330	$7\frac{5}{8}$	300

a In this well, located 4 miles east of Roswell, bed rock was reached at a depth of 360 feet. b Mainly estimated.

Partial list of artesian wells in Roswell district, New Mexico—Continued.

Name of owner and location.	Depth.	Diame- ter.	Yield.a
	Feet.	Inubso	Galls. per
Chaves Co., block 11, Roswell.	206	Inches. $5\frac{5}{8}$	minute. 675
Church, J. P., lot 8, block 45, West Roswell	270	5 ₈	500
Cottingham, J. A., lot 13, block 19, original Roswell.	202	55	600
Davis, W. P., SE. ¹ / ₄ NE. ¹ / ₄ sec. 7, T. 11 S., R. 25 E.	450	5 <u>5</u>	500
Denning, S. P., lot 8, block 51, west side Roswell.	240	55	580
Diamond ice factory, lot 1, block 7, Thurber's addition, Roswell	196	55	700
Dickson, J., northwest corner Washington and 2d sts., Roswell	270	55	660
Dickson, J. M., lot 5, block 52, west side Roswell.	198	55	400
Divers, F., lot 2, block 9, west side Roswell.	232	55	600
Dunn, G., T. 12 S., R. 26 E	264	65	410
Evans, J. F., lot 8, block 28, original Roswell.	200	4	250
Elliott Bros., SW. ¹ / ₄ SW. ¹ / ₄ sec. 32, T. 12 S., R. 25 E.	859	6	612
Faulkner, R. L., lot 10, block 12, west side Roswell.	198	5	500
Ferguson, W. M.:			
Lot 10, block 2, original Roswell.	255	$4\frac{1}{2}$	320
NE ¼ NW. ¼ sec. 15, T. 12 S., R. 25 E.	882	65	987
Finley, M. N., SW. 4 SW. 4 sec. 3, T. 11 S., R. 24 E.	354	75	150
Fitzgerald & Kingston, lot 1, block 17, original Roswell	200	55	600
Fitzgerald, lot 12, block 26, original Roswell.	190	55	500
Frank, C. J., lot 9, block 10, original Roswell.	202	55	600
Garrett, A. D., lot 1, block 20, west side Roswell.	260	55	500
Garst, J., lot 2, block 1, original Roswell.	271	3	250
Garst, Julius, SE. ¹ / ₄ SW. ¹ / ₄ sec. 28, T. 10 S., R. 24 E.	279	65	
Gaslin, H., lot 10, block 48, west Roswell.	242	$4\frac{1}{2}$	350
Gaullier, lot 6, block 1, original Roswell	265	55	680
Goodart, J. H., NW. ¹ / ₄ NE. ¹ / ₄ sec. 7, T. 11 S., R. 25 E	400	45	600
Hagerman, O., lot 3, block 24, South Roswell	405	5	680
Hamilton, R. S., lot 12, block 14, original Roswell	301	$5\frac{5}{8}$	800
Hamilton, J., SW. ¹ / ₄ SW. ¹ / ₄ sec. 26, T. 10 S., R. 24 E	313	65	400
Haynes, C. W.:			
Lot 7, block 20, South Roswell.	310	55	750
Roswell	232	55	750
Do	204	75	750
Do	232	55	700
Henning, J. H., lot 7, block 11, west side Roswell	235	5	400
Hinkle, J., lot 7, block 51, west side Roswell	235	$4\frac{1}{2}$	400
Hobson, Lowe & Co., lot 9, block 3, original Roswell.	270	55	600
Hortenstein, NW. $\frac{1}{4}$ SW. $\frac{1}{4}$ sec. 23, T. 12 S., R. 25 E	840	55	349
Jaffa, N., lot 10, block 3, Thurber's addition, Roswell	200	3	200
Jaffa & Prager, lot 13, block 14, Roswell	380	4	450
Johnson, R. W., lot 7, block 24, west side Roswell	250	55	750
Lawndes, G., NW. ¹ / ₄ NW. ¹ / ₄ sec. 35, T. 11 S., R. 25 E	287		300
Lea, J. C., lot 5, block 4, original Roswell.	230	65	750
L. F. D. stock farm, SE. ¹ / ₄ NW. ¹ / ₄ sec. 1, T. 11 S., R. 24 E	383	658	596
	(333	$4\frac{1}{2}$	100
McCarty, S. S., N. ½ NW. ¼ sec. 14, T. 10 S., R. 25 E		55	300
McClenney, M. E., SE. ¹ / ₄ SE. ¹ / ₄ sec. 35, T. 10 S., R. 24 E		75	600
Marrow & Tannehill, lot 14, block 13, old Roswell		5	500
Meeks, W., lot 6, block 28, original Roswell.		4	250
	230	58	580
Miller, J., lot 4, block 30, original Roswell		1	
Miller, J., lot 4, block 30, original Roswell New Mexico Military Institute, Roswell Parsons, R. M., lot 5, block 54, west side Roswell	232	65 55 58	675

Partial list of artesian wells in Roswell district, New Mexico—Continued.

Name of owner and location.	Depth.	Diame- ter.	Yield.a
	Feet.	Inches.	Galls. per
Deals I C NE 1 CW 1 200 27 T 10 C D 24 F	333	55	400
Peck, J. C., NE. 4 SW. 4 sec. 27, T. 10 S., R. 24 E.	248	55 58	820
Pecos Valley and Northeastern Railroad, Roswell (pressure 12 pounds)	248		
Pettey & Miller, lot 6, block 14, original Roswell.		65	750
Pierce, F., lot 3, block 10, west side Roswell.	264	5 8	600
Rasmussen, E. P., SW. 4 sec. 21, T. 11 S., R. 25 E.	560	5 8	
Ray, J. R., lot 6, block 21, west side Roswell.	221	5 5 8	600
Read, G. W., lot 9, block 6, original Roswell.	224	4	400
Redderson, G., lot 11, block 18, west side Roswell.	250	58	600
Ried, C. M., lot 3, block 12, west side Roswell	175	$4\frac{1}{2}$	300
Roach T., lot 10, block 21, west side Roswell	250	$5\frac{5}{8}$	600
Roach, T. S., lot 9, block 21, west side Roswell	240	$5\frac{5}{8}$	500
Rogers, A. C., sec. 25, T. 10 S., R. 24 E	142	35	2
Rose, I. B., lot 7, block 40, west side Roswell	241	$5\frac{5}{8}$	600
Ross, F., lot 2, block 3, original Roswell.	245	55	500
Roswell Wood and Hide Co., lot 7, block 18, original Roswell	262	$4\frac{1}{2}$	660
Roswell (town):			
Block 23, west side	163	$5\frac{5}{8}$	500
Block 41, west side.	260	$5\frac{5}{8}$	600
Block 47, west side	270	55	600
Seay, E.:			
Lot 8, block 38, west side Roswell.	205	55	500
Lot 11, block 38, West Roswell	170	$4\frac{1}{2}$	400
Sheridan, C., lot 7, block 7, original Roswell.	250	5 <u>5</u>	580
Skipwith, J. II., lot 12, block 8, original Roswell.	249	5	500
Slakey, H. B., lot 9, block 57, west side Roswell.	218	5 §	500
Slaughter, C. C., sec. 34, T. 10 S., R. 24 E., Center.	275	55 55	550
Slaughter, G., Thurber's addition, Roswell	225	5 ₈	460
Smith, L. R., SW. ½ NW. ½ sec. 27, T. 10 S., R. 24 E.	330	75 75	
			300
Smock, W. S., lot 4, block 50, west side Roswell.	235	55	600
Spurlock, SW. \(\frac{1}{4}\) sec. 31, T. 11, S., R. 24 E.		68	324
Stansell, C. N., NE. ¼ SW. ¼ sec. 11, T. 11 S., R. 24 E.		75	350
Stevens, L. A., lot 11, block 19, original Roswell.		5 5	360
Sutherland, lot 5, block 27, original Roswell.		5 5	660
Tipton, W., lot 19, block 6, South Roswell.	300	5 8	
Totsek, S., lot 6, block 42, west side Roswell	238	$5\frac{5}{8}$	600
Veal, G. F., lot 10, block 5, original Roswell.	361	55	600
Waldron, C. E., lot 11, block 22, west side Roswell	240	58	600
Wallace, J. A., lot 5, block 39, west side Roswell	155	5	₹00
Warren, J. R., lot 1, block 23, west side Roswell.	150	4	200
Waskom, A. B., SW. ¹ / ₄ sec. 32, T. 10 S., R. 25 E	560	6§	756
Wells, W. F., lot 1, block 1, Roswell.	230	$5\frac{5}{8}$	660
Whiteman, C., lot 1, block 6, Thurber's addition, Roswell	170	55	400
Wilkenson, W. G., lot 6, block 57, west side Roswell	234	$5\frac{5}{8}$	580
Wilson, B., lot 8, block 44, west side Roswell	235	5 <u>5</u>	600
Woodruff & Hedgecoxe, lot 13, block 15, original Roswell	205	55	660
Wyllys, G. L., lot 7, block 58, West Roswell.	249	55	780
Yater, B. M., lot 7, block 26, original Roswell (pressure about 7 pounds).	203	51	750

a Mainly estimated.

Hagerman district.—In the immediate vicinity of Hagerman there are a few flowing wells, but about 8 miles north, near Dexter and in the lowlands east of Pecos River, there are several. They vary in depth from 300 to 1,000 feet, and the beds penetrated differ somewhat from those of the Roswell district. In the lowlands of Pecos Valley flows of moderate

yield are obtained in soft sandstones at depths of 300 to 500 feet, but on the higher slopes to the west the main flow occurs in porous limestones 800 to 1,000 feet below the surface. The Hedgecoxe well, about 1 mile southeast of Dexter, is 960 feet deep. The main flow occurs in a porous limestone underlying red sandstone 60 feet thick, which is overlain by unconsolidated material.

The following records of wells were furnished by the drillers:

Typical deep borings in Hagerman district, New Mexico.

Record of the Hedgecoxe well, near Dexter:	Fee	
Soil and gravel.	0-	19
Coarse sand		71
Quicksand		271
Limestone.	271-	273
Red sandy clay.	273-	323
Yellow clay	323-	343
Limestone.	343-	345
Quicksand	345-	545
Limestone.	545-	551
Blue clay.	551-	601
Quicksand.	601-	651
"Shell rock"	651-	653
Alternating layers of sand, silt, and clay.	653-	800
Coarse gravel.	800-	806
Red sandstone.		866
Porous limestone.		960
Record of Widdeman well:		
Soil	0-	20
Gravel		55
Quicksand		105
Alternating beds of clay and gypsum.		
Sand.		440
Red sand with layers of clay and one 25-foot layer of gypsum near the middle		
Limestone.		
Record of Cummins well:	000 1	,000
Soil and gravel.	0	40
Sand.		44
Clay		60
Gravel		65
Rock, clay, and sand in alternate layers.		105
Clay and sand.		165
		550
Red sand		820
Coarse red sand and clay in alternate layers.		840
Limestone.	820-	840
Partial record of town well at Hagerman; a	1-	12
Soil		12 22
Conglomerate		
Sand		32
Clay		60
Alternating beds of coarse sand and gravel.		535
Gypsum and red sandy clay in alternate beds		610
Gypsum		630
Red clay and sand		675
Hard gypsum	675-	732
Hard, gray sandstone		735
Gypsum		745
Red clay and sand		750
Gypsum	750-	760

a Boring in progress at time investigation was made.

WATER-SUPPLY PAPER NO. 158 PL. VII

B. WIDDEMAN'S WELL, NEAR DEXTER, N. MEX.



 RASMUSSEN'S WELL, EAST OF SOUTH SPRING, NEW MEXICO,



tial record of H. H. Sigman's well near Lake Arthur: a		Feet.	
Soil and conglomerate	0-	5	
Hard gypsum (first flow at base)	5-	130	
Alternating strata of gypsum and red sand.	130-	235	
Alternating layers of red sand and clay.	235-	345	
White sand	345-	545	
Pod sand	545-	600	

Partial list of artesian wells in Hagerman district.

Name of owner and location.	Depth.	Diam- eter.	Yield. 1
O. H F. H. 77, 12 S. D. 96 F.	Feet.	Inches.	Gallons (per minute).
Calloway, E. H., T. 13 S., R. 26 E. Carper, J. E., NW. ¹ / ₄ NE. ¹ / ₄ sec. 28, T. 12 S., R. 26 E.	330	8	377
Casiers, T. M., NE. ¹ / ₄ NW. ¹ / ₄ sec. 7, T. 13 S., R. 26 E	400	6 <u>5</u>	351
Clem, J. A., E. ½ sec. 11, T. 13 S., R. 26 E.	525	75 75	517
Criser, F. A., E. ½ NW. ¼ sec. 33, T. 12 S., R. 26 E		55 58	300
Cummins, J. Q., SE. \(\frac{1}{4}\) sec. 33, T. 12 S., R. 25 E.		65	250
Elliot, I. H.	760	41	200
Formwault, SW. ½ sec. 31, T. 12 S., R. 26 E.		65	848
Forstad, J., NE. \(\frac{1}{2}\) sec. 13, T. 13 S., R. 26 E.	664	75 75	25
Gever.	300	51	
Goodell, S. W., S. 3 sec. 15, T. 13 S., R. 25 E		8	
Greenfield farm (center), sec. 32, T. 13 S., R. 26 E.	1	55	
Hagerman (town), NE. ½ Sec. 10, T. 14 S., R. 26 E.	760	8	
Hedgecoxe, NE. ¹ / ₄ NE. ¹ / ₄ sec. 18, T. 13 S., R. 26 E.	960	65	600
Lake Arthur, sec. 20, T. 15 S., R. 26 E.		10	764
Large, Frank:			
Sec. 4, T. 13 S., R. 26 E.	375	55	420
Sec. 4, T. 13 S., R. 26 E		75	599
Sec. 4, T. 13 S., R. 26 E.		75	599
Townsley, II. W.:			
NW. 4 sec. 4, T. 13 S., R. 26 E.	440	55	
NW. ¹ / ₄ sec. 4, T. 13 S., R. 26 E.	450	55	
Walters, L., SE. ¹ / ₄ sec. 14, T. 13 S., R. 26 E.	505	55	310
Widdeman, NW. 4 sec. 5, T. 13 S., R. 26 E			
Wilson, P., NW. 4 sec. 18, T. 13 S., R. 27 E.	620		20
Winchell, N. J., SE. ¹ / ₄ SW. ¹ / ₄ sec. 30, T. 13 S., R. 26 E		8	880

¹ Mainly estimated.

EDDY COUNTY.

Artesia district.—The Artesia district comprises the northern portion of the area of flow included in Eddy County. The formations encountered in boring a deep well near Artesia differ somewhat from those in other parts of the Roswell basin. According to well records they consist for the first 500 to 700 feet of unconsolidated beds of sand, gravel, and clay, which by their loose texture frequently offer considerable difficulty in well construction. Beneath these beds there are alternating layers of red and gray sandstone, clay, and gypsum lying on a series of porous limestones, clays, and sandstones, in which the strongest artesian flows occur. A number of records of deep borings around Artesia, as reported by the well drillers, are here given:


a No satisfactory record, particularly of the lower part, could be obtained of this boring, which was originally 1,000 feet deep. There is probably some defect in the easing of the well, for, according to the latest reports, the lower part of the pipe appears to be elogging up with sediment, and there is a perceptible decrease in the pressure of the flow. The best information which could be obtained concerning the formations penetrated in the upper part of this well is here given.

Typical deep borings in Artesia district, New Mexico.

Record of the J. C. Hale well, 14 miles southeast of Artesia:	Feet.
Soil	0- 10
Red clay	
White, coarse sand	
Fine sand	
Bluish clay alternating with sandy layers	
Red clay with layers of gravel	
White sand. Yellow sand	
Red, sand Red, sand Red, sand Red, sand Red, sand Red, sand Red	
Limestone.	
Red, sandy clay alternating with layers of gravel.	
Gravel.	
Hard limestone.	
Limestone and red clav	
Hard and soft light-colored limestone with layers of sandstone.	794-820
Soft, red sandstone.	820-830
Hard, porous limestone and red clay in alternate succession, the limestone predominating.	830-850
Record of the J. S. Majors artesian well, 2 miles north of Artesia:	
Loamy soil	0- 6
Bowlders	
Concretionary conglomerate	
Rock	
Soft sands	
Rocks and bowlders	
Gray sand	
Soft clay. Moderately hard rock.	
Red, sticky clay	
Sticky clay and gravel.	
Coarse, white sand	
Clay and gravel.	
Soft rock.	
Clay	
Red quicksand	310-320
Red clay	320-357
Soft rock	
Soft clay (First flow yielding about 10 gallons per minute)	
Hard rock	
Clay and gravel; some sand	
Clay and sand Soft rock and clay	
Tough, red clay.	
Hard rock.	
Hard clay	
Hard rock.	
Red clay	
Soft rock.	
Hard rock	634-640
Sand and clay	. 640-665
Soft rock, clay, and sand	
Quicksand	
Hard rock (limestone; second flow at base)	
Alternating strata of soft rock and clay.	
Soft and hard rock in alternate layers.	
Very hard rock (limestone)	
Clay and soft rock. Extremely hard rock (limestone)	
Rock, increasing in hardness.	
Record of the Hodges & Venable artesian well, Artesia: a	. 020-020
Soil.	. 0- 10
Bowlders and clay	
Concrete rock	
· · · · · · · · · · · · · · · · · · ·	

 $[\]it a$ In this well flows were obtained at the following depths: First flow, 450 feet; second flow, 648 feet, third flow, 785 feet; fourth flow, 802 feet.

B. SHERMAN'S PUMPING PLANT, NEAR ROSWELL, N. MEX.

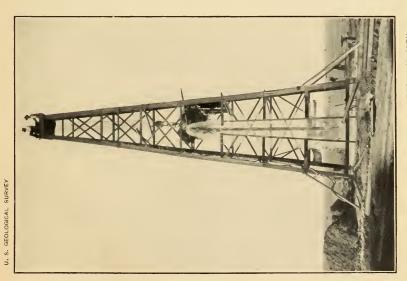

A. ARTESIAN TOWN WELL, AT ARTESIA, N. MEX.



WELLS AND WELL PROSPECTS.

Record of the Hodges & Venable artesian well, Artesia—Continued.	E	et.
Loose gravel.		- 41
	41	46
Concrete rock		- 73
Red clay		
Concretionary gravel		76
Loose gravel		
Hard limestone.	86	-113
Loose gravel containing water.	113	-120
Limestone	120	-130
Red clay	130	-155
Red clay alternating with conglomerate		
Alternating strata of concretionary conglomerate and red clay	185	-250
Red clay		
Alternating layers of red, sandy clay and sandstone.		
Limestone, with an occasional layer of red clay, very hard at base of series	545	-840
Record of the J. B. Barnes artesian well, 12 miles southwest of Artesia:		
Soil		- 6
Bowlders and gravel	- 6	- 13
Yellow clay and gravel	13	- 53
Red clay	53	-153
Quicksand		
Red sand and soft sandstone.		
Soft, yellowish sandstone.		
Hard limestone.	224	-207
Red, sandy clay alternating with soft red sandstone, which gives place to porous lime-		
stone in the lower half of the series. (First flow)		
Soft, red sandstone.	450	-500
Porous limestone.	500	-525
Soft, red sandstone.	525	-535
Record of the S. L. Roberts artesian well, at Artesia:		
Soil	0	- 7
Bowlders and gravel.		- 42
Red, sandy clay containing some gravel.	40	- 44
Red, sandy day containing some gravei	42	-200
Quicksand		
Red clay	260	-300
Alternating layers of gray sand and red clay	300	-600
Limestone	600	-604
Gypsum	604	-634
Red clay.		
Limestone		
Red clay.		
Limestone.		
Red, sandy clay		
Limestone		
Hard limestone.	840	-852
Red, sandy clay	852	-880
Limestone, porous	880	-976
Record of the E. N. Heath artesian well, 2 miles southwest of Artesia:		
Soil and clay	0	- 15
Gravel		- 30
Yellow clay		
Gravel and sand		
Sand	280	-310
Gravel and sand		
Hard, red clay.		
Gypsum	344	-346
Conglomerate	346	-366
Sand with thin streaks of gravel.		
Coarse-grained, porous rock.		
Gray sand.		
Red quicksand		
Rock.		
Red quicksand		
Hard, gray limestone		
Red sand rock with streaks of clay	715	-725
Gray limestone, very hard	725	-745

Record of the W. E. Clark artesian well, 4 miles north of Artesia:	Feet.
Soil	0- 6
Bowlders and gravel	6- 16
Gypsum	16-76
Gravel.	76- 81
Gypsum	81- 90
('oncretionar: conglomerate	90- 95
Hard gray sandstone.	95-106
Red clay streaked with white clay	106-126
Dark-gray sandstone.	126-157
Yellow sand	157-200
Hard gray sandstone.	200-218
Red sand	218-232
Very hard light-gray sandstone.	232-244
Red sand	244-247
Hard red rock	247-250
Red sand	250-268
Hard red rock	268-274
Alternating strata of quicksand and soft red sandstone	274-536
(In this series at 385 feet occurs the first flow; second flow at 475 feet.)	
Very hard limestone	536-540
Red sandstone, medium hardness	

The greatest development in well sinking in this district is around Artesia, where a number of strong artesian flows have been obtained at depths of 800 to 1,000 feet. A partial list of these wells, including their location, depth, and size, is given in the following table:

Partial list of artesian wells in Artesia district.

Name of owner and location.	Depth.	Diam- eter.	Yield.a
	Feet.	Inches.	Galls. per minute.
Artesia (town), NE. ¹ / ₄ NE. ¹ / ₄ sec. 17, T. 17 S., R. 26 E. ^b .		6	
Barnes, J. B., NW. 4 NW. 4 sec. 23, T. 18 S., R. 25 E		6	1,548
Bruce, J. A., NE. ¹ / ₄ NE. ¹ / ₄ sec. 14, T. 17 S., R. 26 E		55	562
C. A. P. Cattle Co., SW. ¹ / ₄ NE. ¹ / ₄ sec. 23, T. 17 S., R. 26 E.		-a	
Clark, W. E. c.			
Deiss, J. J., sec. 32, T. 18 S., R. 26 E.		6	
Gilberts, S. W., SW. 4 sec. 7, T. 18 S., R. 26 E.		6	320
Gilliland, J. W., SE. 4 sec. 9, T. 18 S., R. 26 E. d.	1	6	
Hale, J. C., NW. ¹ / ₄ SE. ¹ / ₄ sec. 15, T. 17 S., R. 26 E.		6	1,168
Harris, N. T., SW. 1/4 SW. 1/4 sec. 14, T. 16 S., R. 26 E.c.			
Heath, E. N., SE. ¹ / ₄ sec. 18, T. 17 S., R. 26 E	746	65	
Hodges & Venable, SE. ¹ / ₄ NW. ¹ / ₄ sec. 23, T. 18 S., R. 25 E.	. 840	6	1,110
Majors, J. S., SW. ¹ / ₄ SW. ¹ / ₄ sec. 31, T. 17 S., R. 26 E	. 823		
Miller, L. C., SW. ¹ / ₄ SW. ¹ / ₄ sec. 8, T. 18 S., R. 26 E	671	6	1,044
Norfleet, A. L., S. ½ NW. ¼ sec. 32, T. 17 S., R. 26 E.			
Rawl & Robertson, sec. 5, T. 17 S., R. 26 E	. 650		
Richey, John, SW. ¹ / ₄ SW. ¹ / ₄ sec. 11, T. 16 S., R. 26 E. ^b	835		
Roberts, S. L., SE. ¹ / ₄ SW. ¹ / ₂ sec. 8, T. 17 S., R. 26 E	976		
Smith, J. Mack, SW. ¹ / ₄ NW. ¹ / ₄ sec. 29, T. 17 S., R. 26 E.	747	65	1,725
Smith & Beckman, sec. 17, T. 17 S., R. 26 E.			
Stanford, L. G., NE. ¹ / ₄ sec. 34, T. 18 S., R. 26 E.	. 797	6	
Walterschied, W. M., E. ½ SW. ¼ sec. 8, T. 17 S., R. 26 E.		6	

a Mainly estimated.

McMillan district.—This district includes the area in the vicinity of McMillan and the valleys of North and South forks of Seven Rivers. Near McMillan the Walters & Shavers and the Lakewood Townsite companies' wells have strong flows from the porous limestone at depths of about 800 feet. The records of these wells indicate that the unconsolidated

b $92\frac{1}{2}$ pounds pressure.

c Incomplete.

d $72\frac{1}{2}$ pounds pressure.

sediments are about 250 feet thick and that the limestone division occurs 500 to 600 feet below the surface. The records of these wells were supplied by the drillers as follows:

Typical deep borings in McMillan district, New Mexico.

Record of the Walters & Shavers artesian well at McMillan:	Feet.
Soily	0- 6
Coarse gravel.	6- 13
White clay	13- 33
Coarse sand and gravel containing water.	33- 43
White chalky rock.	43- 70
Very hard gray sandstone with layers of gravel.	70-170
Hard flinty rock 1	70-177
Red clay and coarse gravel in alternate succession	
Light-colored sandy clay	35-250
Red clay 2	
Alternating strata of gypsum and red clay	254-370
Hard gypsum 3	70-393
Series of gypsum alternating with red clay	93-440
Alternating layers of white gypsum and red sandstone. 4	40-500
Red sand and hard sandstone in alternate layers 2 feet thick	600-650
Hard white limestone 6	50-800
Extra hard limestone	00-820
White limestone becoming softer. (Flow of about 300 gallons)	20-845
Record of the Lakewood Townsite Company artesian well at McMillan:	
Loam and gravel.	0- 49
Soft gypsum in strata 5 to 6 feet thick.	49- 80
White chalky rock.	80-120
Sandstone and gypsum in alternating layers	20-135
Pure white gypsum, moderately hard	35-200
Very hard white gypsum. 2	00-450
Soft rock resembling shale	50-490
Alternating layers of hard and soft white rock containing a few thin layers of sandstone.	
(First flow at 770 feet, second flow at 810 feet)	90-863
Very soft, white rock.	
Alternating layers of soft and hard limestone.	77-880

In Seven Rivers Valley wells are generally shallow, ranging in depth from 150 to 300 feet, and the flows so far have been obtained from the unconsolidated rock. It is probable, however, that wells sunk to a sufficient depth in this region would obtain flows from the limestone division. A partial list of the wells in the McMillan district is given in the following table, and their location is shown on Pl. VI:

Partial list of artesian wells in McMillan district.

Name of owner and location.	Depth.	Diam- eter.	Yield.
			Galls. per
Brogden, J. C.:	Feet.	Inches.	minute.
SE. ½ SE. ½ sec. 15, T. 20 S., R. 25 E	305	$5\frac{8}{8}$	573
Sec. 21, T. 20 S., R. 25 E.		5 <u>5</u>	253
Boyd, G. M., SE. ¹ / ₄ sec. 26, T. 19 S., R. 25 E.	549	55	
Cole, SE. ¹ / ₄ sec. 7, T. 20 S., R. 25 E.	. 195	- 6	
Eatons	400		
Hellyer, W. E.	190	6	12
Lakewood Townsite Co., sec. 27, T. 19 S., R. 26 E	. 885	6	
McDonald:			
NW. ½ sec. 8, T. 20 S., R. 25 E.	146	55	75
NW. ½ sec. 8, T. 20 S., R. 25 E	150	55	
Plott, J. C., S. ½ NE. ¼ sec. 26, T. 19 S., R. 25 E.	347	55	
Walters & Shavers, NW. 1 NW. 1 sec. 23, T. 19 S., R. 26 E.		6	300

PRESSURE OF ARTESIAN WATER.

In connection with the investigation of the geology and underground water relations of the Roswell basin a systematic measurement of well pressures has been carried on. At the time when this investigation was proposed there appeared to be no evidence that the flow was decreasing, but it was feared that the multiplicity of wells within such a limited area would eventually lower the water plane unless greater economy was practiced by the water users. In arranging for the testing and comparison of pressures a number of representative wells were selected at different points throughout the basin, four from Roswell, where many have been sunk in a relatively small area, and others from near Hagerman and Artesia. In making these selections care was exercised to obtain only those which were believed to be representatives of local districts and in perfect condition. In a few instances, however, defective pipes were discovered after the first monthly pressure had been recorded. Careful measurements were taken of these wells each month under uniform conditions so far as possible. The result of this investigation extending over a period of twelve months is shown in the following table:

Record of periodic pressure measurements in pounds per square inch, of artesian wells in the Roswell artesian basin, New Mexico, for year ending May 31, 1905. a

No.	Name and location.	June.	July.	August.	September.	October.	November.	January.	February.	March.	April.	May.	Total loss	or gain.
_	ARTESIA DISTRICT.													
1	Gilliland, b SW. cor. SE. \(\frac{1}{4}\) sec. 19, T. 18 S., R. 26 E.	83	82	80	79	80	79	74	74	723	69	69	-1	4
2	Hale, c NW. 4 SE. 4 sec. 15, T. 17 S., R. 26 E.	88	87	87	84	84	82	80	81	$77\frac{1}{2}$	$77\frac{1}{2}$	771	-1	
3	Hodges & Venable, b middle of west line SE. 1 NW. 1 sec. 23, T. 18 S., R. 25 E	31½	$31\frac{1}{2}$	301	30	29	27	25	251	24	21	21	-1	Λ1
4	Norfleet, b NW. cor. of S. ½ NW. ½ sec. 32,	1 312	312	-		29		20	402	24		21	1	02
_	T. 17 S., R. 26 E.			$62\frac{1}{2}$	61	61	58	55	56	$54\frac{1}{2}$	53	53	_	91/2
5	Richey, b SW. 4 NE. 4 sec. 14, T. 16 S., R. 26 E.						$95\frac{1}{2}$	92	94	92^{1}_{2}	91	91	-	41/2
	HAGERMAN DISTRICT.													
6	Greenfield farm, d sec. 32 (center), T. 13 S., R. 26 E	58	58	57	57	55	$53\frac{1}{2}$	53	53	54				
7	Sigman, H. \mathring{H} ., $\overset{b}{,}$ NW. $\frac{1}{4}$ sec. 20, T. 15 S., R. 26 E.						41	33	301		25	27	-1	4
8	Widdeman, A. J., b SW. 4 SW. 4 sec. 5, T. 13 S., R. 26 E		40	40	40	38	41	413		39	39	39	_	
	ROSWELL DISTRICT.		40	40	40	90	41	412	002	99	99	99		1
9	Hagerman, J. J., b near center of west line NW. 4 SE. 4 sec. 13, T. 11 S., R. 24 E	13	13	13	$13\frac{1}{2}$	131	131/3	131	13 1	14	13 1	$13\frac{1}{2}$	+	1 2
10	Hamilton, b lot 12, block 14 (original townsite), SW. ½ SW. ½ sec. 33, T. 10 S., R. 24 E.	62	6 2	73	7	7	72	7	$7\frac{2}{3}$	8	8	8	+	1.7
11	McClenny, & SE. \(\frac{1}{4}\) SE. \(\frac{1}{4}\) sec. 35, T. 10 S., R. 24 E.	162	162	20	20	20	21	20	211		211/2	211	+	
12	Parsons, b lot 4, block 54 (west side), NE. \(\frac{1}{4}\) SE. \(\frac{1}{4}\) sec. 32, T. 10 S., R. 24 E.	1	7	7	7	7	7	7	71	8	8	8	+	
13	P. V. and N. E. roundhouse, f NE. cor. NW. \(\frac{1}{4}\) SW. \(\frac{1}{4}\) sec. 33, T. 10 S., R. 24 E	12	10	10	12	12	12	12	13	13	13	13	+	1
14	Rasmussen, b SW. 4 NW. 4 sec. 21, T. 11 S. 25 E.	31	31	31	31	31	$32\frac{1}{2}$	33	31	$31\frac{1}{2}$	$31\frac{1}{2}$	311	+	1 2
15	Yater, b lot 7, block 26 (original townsite), NE. \(\frac{1}{2}\) SE. \(\frac{1}{2}\) sec. 32, T. 10 S., R. 24 E	7	7	7	7	7	7	* 7	7	10		10	+	3

a No measurements were obtained for December.
b Casings of Nos. 1, 4, 5, 7, 9, 10, 12, 14, and 15 were in perfect condition, or apparently so; slight leakage at valve of Nos. 1, 3, and 8.
c Decrease in pressure may be due to escape of water into a higher artesian horizon, which is reached by a shallow well not far away.
d This is an old well and the casing may be defective.
c Low pressures in the months of June and July due to leakage in pipe.
f Slight leakage in casing near surface and at valve caused a decrease of pressure in July and August

measurements.

In most cases in the Roswell and Hagerman districts, where the wells were in perfect condition, the pressures of the flows appear to be substantially accordant, but around Artesia there are several wells in which the flows have materially decreased in pressure during the last twelve months. Without a thorough knowledge of the conditions under which artesian water is obtained around Artesia the decrease in pressure of some of the strongest flows in that vicinity might at first appear alarming, but a comparison of this district with that of Roswell, where there is no decrease in pressure, introduces many important factors which have a direct bearing on the case.

At Roswell artesian water is obtained at a depth of about 250 feet, and the materials passed through offer practically no difficulty; as a result, very perfect wells are constructed. Then, too, in this region wells have been built for the last decade, and the well driller is so familiar with the conditions that he can predict with a fair degree of accuracy the materials to be encountered in sinking a well. Farther south in the basin, in the vicinity of Artesia, a successful artesian well is not so easily obtained. Here the main flow is reached at much greater depths, which range from 700 to 900 feet, depending on the location. The increased depth is due to the presence of beds overlying the porous limestone series. They consist of red sand and gypsum of the supposed Permian series, and clay, fine sand, and gravel of the unconsolidated deposits. The sands predominate throughout and have often a loose texture familiarly known to the well driller as quicksand. This material is very difficult to drill through because of caving, and in one or two instances it was so troublesome that the owner was compelled to abandon the project. The pressure at the surface in an average well around Artesia is about 80 pounds to the square inch, which means over 400 pounds to the square inch at the bottom of a well 800 feet deep. Such forces are difficult to manage, particularly where exploitation in the region has not been sufficiently extensive to enable the well driller to thoroughly acquaint himself with the nature of the obstacles to be encountered, and make suitable provision for them. The region is also one that offers considerable inducement to the ambitious well driller. As a result, new machines are constantly coming into this field, and the operators, though skilled in the art of well drilling, are entirely unfamiliar with this locality. It can readily be seen that under these circumstances imperfect wells are likely to result. Some of the strongest flows in the basin are and have been unmanageable since their completion, while others owing to unfavorable conditions are not working satisfactorily.

COMPOSITION OF ARTESIAN WATERS.

General statements.—The artesian waters of the Roswell basin are all more or less mineralized, but in only a few cases are the mineral constituents present in sufficient amounts to materially affect the taste or to be deleterious to plant growth. An average sample of the waters of North and South Spring rivers contains 75 parts of soluble matter to 100,000 parts of water. About two-thirds of the total solids consists of calcium carbonate and calcium sulphate, which are regarded as harmless to plants. The more soluble ingredients of the water, consisting of sodium chloride, magnesium sulphate, and potassium sulphate, occur in amounts too small to injure plant growth if the ground is properly

drained. The following analyses of waters of North and South Spring rivers were made by Prof. E. M. Skeats, of El Paso, Tex.:

Analyses of water from springs in North Spring and South Spring rivers.

SAMPLES FROM MARGINAL SPRINGS IN NORTH SPRING RIVER.

[Parts per million.]

	Total solids.	Silica (SiO ₂).	Water.	Cal- eium (Ca).	Magne- sium (Mg).	Sodium (Na).	Chlorine (Cl).	Sul- phuric acid (SO ₄).	Carbonic acid (CO ₃).
No. 1	820	15	84.7	122. 3	46.8	57.5	93. 6	281. 9	118.1
No. 2	710	20	96. 9	146.6	48.8	8. 5	56. 4	240. 6	116. 9
No. 3	700	25. 1	65	106. 2	45. 4	37.5	78. 9	242. 1	102.0
No. 4	635. 6	15		126. 0	43. 5	22. 5	67. 9	245. 6	115, 1
No. 5	610	20	14. 1	102. 2	43. 4	30. 3	49. 6	245.5	104. 9
Mean	699. 1	19	52. 1	120. 7	45. 6	31. 2	69. 3	251. 5	111. 4

SAMPLES FROM MARGINAL SPRINGS IN SOUTH SPRING RIVER.

[Parts per million.]

	Total solids.	Silica (SiO ₂).	Water.	Calcium (Ca).	Sedium (Na).	Chlorine (Cl).	Carbonie acid (CO ₃).	Calcium magne- sium sul- phate.
No. 1	700	26. 9	49. 4	- 80.9	23. 5	46. 7	121. 6	351
No. 2	730	30.8	50.0	72. 1	51.0	63. 0	107. 9	355. 2
No. 3	690	22. 3	53.0	76.1	16.8	27.9	114. 9	378
No. 4	790	16.0	63. 4	72. 1	32. 1	48. 5	107. 9	450
No. 5	1,140	50.0	94.0	80. 1	62. 1	63. 7	119. 9	670
No. 6	1,070	41. 5	85. 5	80. 1	52. 8	81. 2	119. 9	609
Mean	853, 3	31. 2	65. 9	92. 3	44. 7	66. 2	115. 4	468. 9

SAMPLES FROM BOTTOM SPRINGS IN SOUTH SPRING RIVER.

	Total solids.	Silica.	Water.	Ca.	CO ₃ .	Na.	Cl.	Calcium magne- sium sul- phate.
No. 1	680	27. 2	51.8	111	74	18. 9	29. 1	368.0
No. 2	650	13. 4	51. 2	106. 2	70.8	17. 1	26. 3	365
No. 3	700	9. 6	57.0	106. 2	70.8	19. 9	30. 5	406
No. 4	670	20.5	52. 5	106. 2	70.8	18. 7	28.8	372. 5
No. 5	620.8		27.8	109. 2	72.8	17. 3	26.7	367
No. 6	700	50. 2	55.0	106.8	71. 2	16.9	25. 9	374
No. 7	690	38. 3	55.0	106. 2	70.8	18.0	27.7	374
No. 8	700	41.6	53. 9	105. 6	70.4	17.5	27.0	384
No. 9	690	45. 0	51.0	112. 5	75.0	17. 5	27. 0	362
Mean	678	27. 4	50. 5	107. 8	71. 8	18.0	27. 7	374

The composition of the artesian water at Roswell differs somewhat from that of North Spring River. The total solids are greater and also the amount of sodium chloride. The following analysis will show the composition of the water from a number of representative wells at Roswell.

Analyses of water from artesian wells at Roswell.

[Individual data. Parts per million.]

Name and date.	Depth.	Tem- pera- ture.	Total solids.	Silica.	Ca.	CO ₃ .	Mg.	Na.	CI.	Cal- cium mag- nesium sul- phate.
Crowley:	Feet.	\circ F .								
April, 1896	155	64. 5	1130	48.0	76. 1	113. 9		160.9	247. 6	483. 5
April, 1897	155	64. 5	930	69. 5	70. 1	94. 9		114.5	176.0	395.0
Matthews, Tenn., south of	192	69	680	86, 5	56. 1	83. 9		44. 7	68. 8	340.0
Cahcon:										
1895	227	70. 5	860	91.0	76. 1	113. 9		92. 2	141. 8	315.0
1896	227	70.5	790	35. 5	71.1	106. 4	3. 9	96. 5	108.0	316. 6
Poe, J. W	237	69	930	46.0	76. 1	113. 9		89. 8	138. 2	466.0
Judge Lea	225	71	810	20.2	76.9	115. 1		86. 6	133. 2	378.0
Captain Clark	256	69. 25	1,330	123.0	70. 1	94. 9		154.1	236. 9	641.0
Miller, H. M	230		1,020	72.3	63. 1	106. 4	5. 67	111.5	171.5	487.5
Prager	218		1,170	92. 8	73.8	110. 4		106.0	163.0	576.5
Steam laundry			1,290	182.0	68. 0	102.0		183. 6	282. 4	472.0
Lea, J. C	331		1,160	33.0	70. 1	94. 9		150.0	230.0	572.0

The waters of the larger tributaries of Pecos River from the west, analyzed by Prof. E. M. Skeats, are reported to have the following composition:

Analyses of water of the Hondo, Felix, North and South forks of Seven Rivers, and Penasco rivers.

River and location.	Total solids.	Silica, etc., plus water.	Ca.	Mg.	Na.	CO3.	SO ₄ .	C1.	Tem- pera- ture.	Remarks.
									° F.	
Hondo (above Pleacho).	1, 195	80.7	231. 9	59. 1	37. 1	104. 3	622. 4	59. 5		Water fairly clear.
Felix (head spring)	467. 2	18.8	107. 9	23. 9	15. 2	125.0	152.0	23. 3	64	
South Seven (head spring).	1,320.0	194.9	231. 7	74.7	13. 8	112. 4	670. 9	21. 3	66, 5	
North Seven (head spring).	1,020.0	75, 6	164. 0	71.8	38. 9	102. 2	567.7	19.8		
Penasco (by Gilberts)	650. 0	10.0	136.7	42.8	15. 2	107. 9	324. 3	23. 3		Trace of hydrogen sul- phide.

ORIGIN OF THE ARTESIAN WATER.

The water-bearing formations in the Roswell artesian area outcrop in successive zones on the higher slopes to the west. There they receive their water supply by direct absorption from rainfall and by the sinking of streams (see Pl. IX). The Hondo, Γ elix, Penasco, and Seven rivers are the most important sources. These streams all rise high on the slopes of the Capitan, Sierra Blanca, and Sacramento mountains, where the rainfall is relatively large. As a result they carry an abundance of water in their upper courses, all of which sinks in the outcrop zone of the porous limestones and the overlying formations and passes underground to the east. After the water has entered these porous formations it is confined by impervious layers of limestone or clay, and under the lower lands to the east it is under considerable pressure.

AMOUNT OF ARTESIAN WATER.

It is difficult to make even an approximate estimate of the total amount of artesian water available in the porous formations underlying the Roswell artesian area. We do not know definitely how much water is absorbed by the permeable rocks in their western outcrop, and we are unable to calculate the amount which escapes through springs and by underflow along Pecos River.

The area drained by the larger western tributaries of Pecos River comprises in all about 4,000 square miles. It lies along the east slopes of the Capitan, Sierra Blanca, and Sacramento mountains. The location and extent of the combined watersheds of all streams supplying water to the underlying formations of the Roswell basin is shown in Pl. IX. The annual precipitation for this general region is comparatively large, ranging from 10 to 20 inches. The mean annual precipitation at Fort Stanton, N. Mex., which lies in the area drained by Hondo River, is about 15 inches. The average for seventeen years prior to 1891 was 19 inches, but from 1901 to 1903, inclusive, the annual rainfall was far below the average. The following table shows the result of observations through a period of nearly five years, ending with 1904:

Monthly and annual precipitation, in inches, at Fort Stanton, N. Mex.

Year.	Jan.	Feb.	Mar.	Apr.	May.	June.	July.	Aug.	Sept.	Oct.	Nov.	Dec.	An- nual.
1900. 1901. 1902. 1903. 1904.	0. 10 0. 05 0. 36	0. 38 0. 75	0. 22 0. 17	0.90 0.00 0.20	0. 64 1. 88 0. 38	1. 34 0. 24 3. 41	2. 28 0. 62	1. 85 1. 87 1. 55	2.00 0.48 1.55	1.76 1.81 0.48	2. 85 0. 16 0. 00	0. 95 0. 57 0. 05	9. 94 9. 52

At Lower Penasco, situated on the headwaters of Penasco River, the mean annual precipitation is about 18 inches, as is shown by the following table:

Monthly and annual precipitation, in inches, at Lower Penasco, N. Mex.

Year.	Jan.	Feb.	Mar.	Apr.	May.	June.	July.	Aug.	Sept.	Oct.	Nov.	Dec.	An- nual.
1896									1. 57		Т.		16. 27
1897 1898	0.60	0.25		1.65	0.70	1.80		4.00	1. 15	T.	0.10	2. 40	20. 35
1899 1900	T. 0.90	0. 20	0. 35 0. 35		0 1.70			1. 35 1. 95		1. 15 1. 05	1.50 T.	1. 05 0. 60	16. 09 20. 05
1901 1902					1. 15 0. 35	1. 05 0. 30	6. 68		3. 90				

From the above statements it is apparent that the total amount of water which falls during a year of average precipitation throughout the combined watershed of the Hondo, Felix, Penasco, and Seven rivers is necessarily large. Of course a portion of this water is lost by evaporation and run-off, but a considerable amount is absorbed by the water-bearing rocks and becomes available to the east as artesian water. It has not been practicable in the present investigation to compute the total outflow of all the artesian wells in the Roswell basin, but at a liberal estimate this amount would probably be only a small proportion of the quantity absorbed by the water-bearing rocks throughout their western outcrop area. This is clearly shown by the large number of wells which it has been possible to sink in the town of Roswell without materially diminishing the flows of some of the first wells dug. It is possible that the amount of artesian water available around Artesia is not so great as at




MAP OF SHOWING T





MAP OF SOUTHEASTERN NEW MEXICO SHOWING THE GENERAL ARTESIAN CONDITIONS



LEGEND



Approximate area in which the principal water bearing rocks outcrop



Watershed of drainage which crosses the outcrop area of the water-bearing beds



Artesian area

Contour interval 250 feet



Roswell, but the only evidence of this is the decrease in pressure of some of the wells at Artesia. The combined watershed of the streams lying west of this part of the basin is larger than that of Hondo River, and according to the Weather Bureau records it has a somewhat greater annual rainfall. For these reasons we would expect the formations underlying the southern part of the basin to contain a large amount of water. While there is evidence of a general decrease in flow throughout the Artesia district, it is probable that this diminution is largely due to the clogging of the pipes with sediment, the escape of water along the outside of the tubing from lower to higher horizons, and various other causes which are known to affect the flow of artesian wells.

It is believed that there is no cause for fear that the water supply throughout the northern part of the Roswell basin will give out or become inadequate for all requirements under proper economy of practice. In the region of Artesia and McMillan not enough wells have been sunk to indicate the amount that the water-bearing beds may be expected to yield.

WASTE OF WATER.

There is pressing need for greater econony on the part of the users of well water throughout the Roswell basin. At Roswell a city ordinance regulates the management of all flowing wells, but throughout the remainder of the district no restraint whatever is placed upon the management of the wells, and, with very few exceptions, they are allowed to flow continuously. A small portion of this water is stored in artificial reservoirs, but by far the greater part runs off into pools, evaporates and seeps away on uncultivated lands, or runs directly into Pecos River. In one case noted a ditch leads from the well directly to the river, a distance of one-half mile, and it is not an unusual thing to find water flowing from the wells to low, marshy lands adjacent to the river, where by underflow it soon reaches the main channel. Formerly many of the wells were not even furnished with reservoirs, and the water was carried by laterals directly to the fields during the irrigating season, and at other times was allowed to flow off through wasteways.

Nearly all the wells that are being constructed at the present time in the southern part of the basin are to be furnished with reservoirs ranging in capacities from 6 to 24 acre-feet, which are filled as often as necessary during the irrigating season. Even these commendable provisions are quite ineffectual in the case of wells not provided with valves, as they conserve only a relatively small portion of the total flow. An effort is now being made by a few of the well owners in the vicinity of Artesia to provide each well with a suitable valve, so that, when the water is not in use and the reservoir is full, the flow can be shut down. There is a general prejudice among well owners against shutting off the flow, as they fear that it will decrease the efficiency of the well. It is true that in a few cases wells have been damaged in this way, but where they were properly constructed the per cent injured is very small.

SHALLOW WELLS.

More or less water is obtained throughout the Roswell basin at depths varying from 25 to 200 feet. The water usually occurs in coarse gravel of the unconsolidated deposits. The supply appears to be inexhaustible, and in many cases the water is used for irrigation purposes. Outside the area of flow from Roswell to Hagerman there are a number of wells 75 to 100 feet deep, which furnish 5,000 to 7,000 gallons of water a day. The water is generally pumped with windmills. In the vicinity of Roswell a few deep nonflowing wells are provided with gasoline engines. A gasoline pumping plant on Sherman's farm, at Roswell, is shown in Pl. VIII, B.

Bordering the area of flows throughout the Roswell basin there is a zone of irrigable land 3 to 5 miles wide, in which water would probably rise in deep wells to within 100 feet of the surface, so that it could be profitably pumped for irrigation. The approximate limits of this area are shown on Pl. VI.

The following list gives the principal features of a number of shallow wells in the northern part of the Roswell basin:

List of shallow wells in the Roswell basin.

Name of owner and location.	Depth.	Amount pumped per day.
	Feet.	Gallons.
Albrecht, E, O., NW. 4 sec. 32, T. 12 S., R. 25 E.	88	
Altebery, J. R., S. ½ NW. ¼ sec. 28, T. 11 S., R. 23 E.	208	
Bethel, II., W. ½ NW. ¼ see. 1, T. 17 S., R. 25 E	72	
Bowers, J. S., SW. 4 sec. 23, T. 11 S., R. 23 E	132	7,000
Brink, F., E. 1 NW. 4 sec. 15, T. 11 S., R. 23 E.	125	7,000
Clark, J. H.:		
NW. 4 see. 18, T. 17 S., R. 26 E.	38	
SE. ¹ / ₄ SE. ¹ / ₄ sec. 12, T. 17 S., R. 25 E.	100	
Com, W. W., SW. ¹ / ₄ SW. ¹ / ₄ sec. 35, T. 11 S., R. 25 E.	42	
Costa, N., SE. ¹ / ₄ SE. ¹ / ₄ see. 8, T. 11 S., R. 24 E.	27	6,000
Gilbert, C. H., NE. \(\frac{1}{2}\) NE. \(\frac{1}{2}\) sec. 21, T. 11 S., R. 25 E.	360	
Gishwiller, J. A., SW. 4 sec. 18, T. 11 S., R. 24 E.	71	8,000
Hobbs, J. W.	58	
Hobbs & Hanney, SE. 1/4 sec. 2, T. 11 S., R. 23 E.	77	5,000
Hortenstein, SW. \(\frac{1}{4}\) sec. 23, T. 12 S., R. 25 E.		6,000
Miller, F., T. 11 S., R. 23 E.	85	2,000
Millheiser, P.:		
SW. ¹ / ₄ SW. ¹ / ₄ sec. 7, T. 11 S., R. 24 E.	30	3,000
SW. ¹ NE. ¹ sec. 7, T. 11 S., R. 24 E.	175	5,000
Paulson, P. O., NW. \(\frac{1}{4}\) sec. 30, T. 13 S., R. 26 E.	58	
Peck, J. C., SE. \(\frac{1}{4}\) sec. 27, T. 11 S., R. 23 E.		5,000
St. John, J. A., SE. ¹ / ₄ SE. ¹ / ₄ sec. 18, T. 11 S., R. 24 E.		7,000
Saunders, J. P., SW. ¹ / ₄ NW. ¹ / ₄ sec. 8, T. 13 S., R. 25 E.		
Smith, E. L., T. 11 S., R. 23 E.	129	7,000
Stockard, J. W.:		
SE. ¹ / ₄ SE. ¹ / ₄ sec. 23, T. 11 S., R. 23 E.	150	7,000
NW. 1 SE. 1 sec. 23, T. 11 S., R. 23 E.		6,000
Turner, W. P., NE. ¹ / ₄ NE. ¹ / ₄ sec. 7, T. 11 S., R. 24 E.	30	6,000
White, G. A., sec. 18, T. 14 S., R. 26 E.	84	
Williams, O. L., NE. ¹ / ₄ sec. 7, T. 12 S., R. 25 E.	103	

IRRIGATION.

Irrigation has been practiced to some extent in the Roswell basin since the first settlements were made, but prior to 1889 only a few small farms were irrigated. The permanent water supply in the vicinity of Roswell was the first to be utilized. Here a number of small ditches were dug, and by extending these ditches from time to time the present Roswell irrigation system has been developed. The Northern canal system, which irrigates the territory south of Roswell, was built by a development company as a part of a large irrigating project, designed to irrigate Pecos Valley from Roswell to the Texas-New Mexico line.

Roswell system.—A number of ditches have been constructed from the head springs of Middle and South Berrendo and North and South Spring rivers, which furnish water for the land along their valleys. The surplus water of these ditches is directed into the Northern canal to be used for irrigation farther down Pecos Valley.

Northern canal.—This canal extends from Hondo River at a point about 5 miles east of Roswell to near Lake Arthur, a distance of about 35 miles, and irrigates a large district of well-improved farming land in the vicinity of Hagerman. Besides receiving water from

the Berrendo and North and South Spring rivers, the Northern canal is supplied with water to some extent by artesian wells. Though the water of the Northern canal is highly mineralized from the large amount of seepage water which it receives in the vicinity of Roswell, the harmful salts apparently are not present in sufficient quantities to affect plant growth. The following analysis made by Prof. E. M. Skeats shows the average condition of the Northern canal water:

Anai	lysis	of	"North	hern	canal	water.

Parts per	million.
Sodium (Na)	256. 1
Sodium and potassium sulphates	230.0
Magnesium (Mg)	50. 4
Calcium (Ca)	. 428.0
Chlorine (Cl)	. 393.9
Carbonic acid (CO ₃)	. 101.9
Sulphuric acid (SO ₄)	. 349.7
Silica, alumina, and iron (SiO ₂ Fe ₂ O ₃ Al ₂ O ₃)	20.0
Water of crystallization.	. 190.0
Total solid	2.020.0

Hondo project.—Preparations are now being made by the Government to store the flood waters of Hondo River for the purpose of irrigating lands along Hondo Valley above Roswell. The location of the proposed reservoir is in a high natural depression on the divide between Blackwater Arroyo and Hondo River. The surface rock in the vicinity is a massive blue limestone, weathering to light gray, underlain by alternate layers of gypsum and red and yellow clay. The bedding was originally uniform, but surface waters have dissolved the gypsum, causing a settling of the beds in the bottom of the reservoir and considerable local distortion around its rim. A number of borings were made with a diamond drill in the bottom of the reservoir, in order to determine the character of the underlying rocks. The following is a record of one of these borings:

Record of diamond-drill boring, Hondo reservoir site, New Mexico.

	Feet.
Clay	0 -11.1
Broken limestone	11. 1-22
Clay	22 -25
Cavity	25 -30
Broken rock cavities.	30 -64.4
Gypsum	64. 4-70. 2
Clay	70. 2-71. 9
Cavity	71. 9-73. 4
Loose rock	73, 4-76, 8
Gypsum	76, 8-79, 8
Clay	
Limestone	80, 2-88, 4
Gypsum	

ARTESIAN IRRIGATION.

The use of artesian water for irrigation in the Roswell area began soon after the first flowing wells were obtained, and it has been gradually increasing ever since. Irrigation from the waters of Hondo and North and South Spring rivers has been practiced, as previously stated, for many years, and the use of artesian water was not resorted to until most of the surface waters of the region had been appropriated. There are now several farms in the vicinity of Roswell that depend entirely on artesian water for irrigation, and to the south nearly all the land included in the area of flow has been filed on with the intention of reclaiming it by artesian irrigation. Many of the farmers in the vicinity of Roswell who have practiced artesian irrigation for several years have obtained results which are highly satisfactory. This has caused considerable interest and enthusiasm among those living farther south in the less developed portions of the basin, and in this region

many large wells are now being sunk, which will be used exclusively for irrigation. Many of these wells are being provided with storage reservoirs, so that a larger amount of water will be available during the growing season.

Among many landowners throughout the area there is a tendency to overestimate the amount of land that can be irrigated from an ordinary artesian well. According to conservative estimates made by irrigators who have had considerable experience in this locality a flowing well with a yield of 450 gallons per minute, provided with a suitable storage reservoir, will irrigate 30 acres of alfalfa or 70 acres of orchard. In order to accomplish this, however, the land must have the proper slope and the soil must be of uniform texture. Alfalfa requires more water than any of the staple crops. Under ordinary conditions 30 inches per year is sufficient, but if the land is irrigated during the winter a larger quantity is required. If this amount of water is properly applied, three or four crops may be cut, the harvesting period ranging from May to the latter part of August. An average yield of alfalfa is 1 ton to the acre for each cutting.

It is difficult to make definite statements regarding the irrigation of orchards in this locality. It is accomplished in many different ways, depending mainly on the age and condition of the trees. In many instances vegetables are raised between the rows of trees, and no additional water is required for the irrigation of the orchard. It is generally sufficient to water an orchard once a month during the summer and once, or possibly not at all, during the winter. About 15 to 20 inches of water a year is required.

CLIMATE.

Temperature.—The climate of the Roswell basin does not differ materially in the prevailing aridity from that of the remainder of southern and eastern New Mexico. The temperature of the region is high, with a low relative humidity. The summers are usually long and hot and the winters mild and pleasant. The maximum temperature is 110° and the minimum seldom falls far below zero. The following tables compiled from the records of the United States Weather Bureau give the mean monthly maximum and minimum temperatures of the Roswell district. The observations extend over a period of ten years, 1895 to 1904, inclusive:

Mean monthly temperature at Roswell, N. Mex.

	Jan.	Feb.	Mar.	Apr.	May.	June.	July.	Aug.	Sept.	Oct.	Nov.	Dec.
Maximum			85. 4 18. 4				99. 2 56. 8	99. 4 55	97. 3 41	87. 5 28. 5		74. 2 7. 5

Rainfall.—The average annual precipitation at Roswell is 16.6 inches. The greater part of this amount falls during the months of June and July in frequent showers, which, although often violent, are generally local and of short duration. Only a small percentage of the annual precipitation falls as snow. The following record of the monthly and annual pecipitation at Roswell, extending over a period of ten years, shows considerable variation:

Monthly and annual precipitation, in inches, at Roswell, N. Mex.

Year.	Jan.	Feb.	Mar.	Apr.	May.	June.	July.	Aug.	Sept.	Oct.	Nov.	Dec.	An- nual.
1895	0, 40	0, 48	0.02	0. 14	2. 31	1, 28	4, 45	2. 99	1, 09	2. 11	0. 85	0.07	16, 19
1896			0.02	Т.	0.12	1. 97	1.79	0.40	1.89	5. 46	0	0.64	13. 12
1897	1. 12	0	0.59	1. 35	3. 76	1. 42	2.78	2.94	1, 25	: 44	T.	T.	15. 65
1898	0.26	0.86	T.	0.34	1.03	6.05	6. 53	2.99	0.69	T.	0.50	1. 37	20, 62
1899	0.06	0.15	0.06	0. 23	0. 27	1.62	4. 37	1. 21	3. 64	0.20	3. 21	1.54	16.56
1900	0.96	T.	0.50	0.39	1.62	2. 13	2.85	1. 25	6.53	3. 33	0.17	0.07	19.80
1901	0.21	1. 15	0.00	0.97	1.04	0.22	3.04	0.60	1.99	2. 21	6. 15	0.26	17.84
1902	1.24	0.00	0.83	T.	0.70	1.03	5. 52	1.80	3.08	1. 36	0.52	0.50	16.58
1903	0.22	0.96	0.10	Т.	0.74	4.37			0.92	T.	0.00	0.00	
1904	0.16	0.14	0.00	0.07	1. 30	1.80	1. 23	0.83	5. 10	2.67	0.15	0.30	13. 75

The heaviest rainfall ever recorded at Roswell was on October 31, 4901, when 5.65 inches fell in one night, causing considerable damage by flooding.

AGRICULTURE.

The general aridity of the climate renders farming without irrigation impracticable except in a few low-lying areas adjacent to Pecos River. In consequence agriculture is restricted to those portions of the valley where water can be obtained from some of the various canals or from artesian wells. The cultivated portions of the basin at present comprise about one-eighth of the total area included in this report, the remainder being utilized for pasturage of cattle-an industry to which the higher lands are well adapted. The chief products are alfalfa, Kaffir corn, wheat, oats, corn, potatoes, Mexican beans, cantaloupes, celery, and a large variety of garden vegetables. Alfalía and Kaffir corn are perhaps the largest crops and both are consumed in the region. Fruit raising is a growing industry and many large orchards are found in the irrigated district. Peaches, pears, plums, cherries, and other small fruits have a hardy growth and an abundant yield, but the apple crop is the most important. At South Spring there is a large apple orchard, comprising about 600 acres, from which many thousand pounds of apples are shipped annually. Several large apple orchards have been planted during the last five years, and fruit raising seems destined to become one of the most important industries of the district. The seasons are ordinarily of sufficient length to insure the maturity of all cultivated crops.

IRR 158-06-3



CLASSIFICATION OF THE PUBLICATIONS OF THE UNITED STATES GEOLOGICAL SURVEY.

[Water-Supply Paper No. 158.]

The serial publications of the United States Geological Survey consist of (1) Annual Reports, (2) Monographs, (3) Professional Papers, (4) Bulletins, (5) Mineral Resources, (6) Water-Supply and Irrigation Papers, (7) Topographic Atlas of United States—folios and separate sheets thereof, (8) Geologic Atlas of the United States—folios thereof. The classes numbered 2, 7, and 8 are sold at cost of publication; the others are distributed free. A circular giving complete lists may be had on application.

Most of the above publications may be obtained or consulted in the following ways:

- 1. A limited number are delivered to the Director of the Survey, from whom they may be obtained, free of charge (except classes 2, 7, and 8), on application.
- 2. A certain number are delivered to Senators and Representatives in Congress, for distribution.
- 3. Other copies are deposited with the Superintendent of Documents, Washington, D. C., from whom they may be had at prices slightly above cost.
- 4. Copies of all Government publications are furnished to the principal public libraries in the large cities throughout the United States, where they may be consulted by those interested.

The Professional Papers, Bulletins, and Water-Supply Papers treat of a variety of subjects, and the total number issued is large. They have therefore been classified into the following series: A, Economic geology; B, Descriptive geology; C, Systematic geology and paleontology; D, Petrography and mineralogy; E, Chemistry and physics; F, Geography; G, Miscellaneous; H, Forestry; I, Irrigation; J, Water storage; K, Pumping water; L, Quality of water; M, General hydrographic investigations; N, Water power; O, Underground waters; P, Hydrographic progress reports. This paper is the eighty-first in Series B, the twentieth in Series I, and the fifty-first in Series O, the compete lists of which follow (PP=Professional Paper; B=Bulletin; WS=Water-Supply Paper):

SERIES B, DESCRIPTIVE GEOLOGY.

- B 23. Observations on the junction between the Eastern sandstone and the Keweenaw series on Keweenaw Point, Lake Superior, by R. D. Irving and T. C. Chamberlin. 1885. 124 pp., 17 pls. (Out of stock.)
- B 33. Notes on geology of northern California, by J. S. Diller. 1886. 23 pp. (Out of stock.)
- B 39. The upper beaches and deltas of Glacial Lake Agassiz, by Warren Upham. 1887. 84 pp., 1 pl. (Out of stock.)
- B 40. Changes in river courses in Washington Territory due to glaciation, by Bailey Willis. 1887.

 10 pp., 4 pls. (Out of stock.)
- B 45. The present condition of knowledge of the geology of Texas, by R. T. Hill. 1887. 94 pp. (Out of stock.)
- B 53. The geology of Nantucket, by N. S. Shaler. 1889. 55 pp., 10 pls. (Out of stock.)
- B 57. A geological reconnaissance in southwestern Kansas, by Robert Hay. 1890. 49 pp., 2 pls. (Out of stock.)
- B 58. The glacial boundary in western Pennsylvania, Ohio, Kentucky, Indiana, and Illinois, by G. F. Wright, with introduction by T. C. Chamberlin. 1890. 112 pp., 8 pls. (Out of stock.)

- B 67. The relations of the traps of the Newark system in the New Jersey region, by N. H. Darton. 1890. 82 pp. (Out of stock.)
- B 104. Glaciation of the Yellowstone Valley north of the Park, by W. H. Weed. 1893. 41 pp., 4 pls. (Out of stock.)
- B 108. A geological reconnaissance in central Washington, by I. C. Russell. 1893. 108 pp., 12 pls. (Out of stock.)
- B 119. A geological reconnaissance in northwest Wyoming, by G. H. Eldridge. 1894. 72 pp., 4 pls. (Out of stock.)
- B 137. The geology of the Fort Riley Military Reservation and vicinity, Kansas, by Robert Hay. 1896. 35 pp., 8 pls.
- B 144. The moraines of the Missouri Coteau and their attendant deposits, by J. E. Todd. 1896. 71 pp., 21 pls.
- B 158. The moraines of southeastern South Dakota and their attendant deposits, by J. E. Todd. 1899. 171 pp., 27 pls.
- B 159. The geology of eastern Berkshire County, Massachusetts, by B. K. Emerson. 1899. 139 pp., 9 pls.
- B 165. Contributions to the geology of Maine, by H. S. Williams and H. E. Gregory. 1900. 212 pp., 14 pls.
- WS 70. Geology and water resources of the Patrick and Goshen Hole quadrangles in eastern Wyoming and western Nebraska, by G. I. Adams. 1902. 50 pp., 11 pls.
- B 199. Geology and water resources of the Snake River Plains of Idaho, by I. C. Russell. 1902. 192 pp., 25 pls.
- PP 1. Preliminary report on the Ketchikan mining district, Alaska, with an introductory sketch of the geology of southeastern Alaska, by A. H. Brooks. 1902. 120 pp., 2 pls.
- PP 2. Reconnaissance of the northwestern portion of Seward Peninsula, Alaska, by A. J. Collier. 1902. 70 pp., 11 pls.
- PP 3. Geology and petrography of Crater Lake National Park, by J. S. Diller and H. B. Patton. 1902. 167 pp., 19 pls.
- PP 10. Reconnaissance from Fort Hamlin to Kotzebue Sound, Alaska, by way of Dall, Kanuti, Allen, and Kowak rivers, by W. C. Mendenhall. 1902. 68 pp., 10 pls.
- PP 11. Clays of the United States east of the Mississippi River, by Heinrich Ries. 1903. 298 pp., 9 pls.
- PP 12. Geology of the Globe copper district, Arizona, by F. L. Ransome. 1903. 168 pp., 27 pls.
- PP 13. Drainage modifications in southeastern Ohio and adjacent parts of West Virginia and Kentucky, by W. G. Tight. 1903. 111 pp., 17 pls.
- B 208. Descriptive geology of Nevada south of the fortieth parallel and adjacent portions of California, by J. E. Spurr. 1903. 229 pp., 8 pls.
- B 209. Geology of Ascutney Mountain, Vermont, by R. A. Daly. 1903. 122 pp., 7 pls.
- WS 78. Preliminary report on artesian basins in southwestern Idaho and southeastern Oregon, by I. C. Russell. 1903. 51 pp., 2 pls.
- PP 15. Mineral resources of the Mount Wrangell district, Alaska, by W. C. Mendenhall and F. C. Schrader. 1903. 71 pp., 10 pls.
- PP 17. Preliminary report on the geology and water resources of Nebraska west of the one hundred and third meridian, by N. H. Darton. 1903. 69 pp., 43 pls.
- B 217. Notes on the geology of southwestern Idaho and southeastern Oregon, by I. C. Russell. 1903. 83 pp., 18 pls. (Out out stock.)
- B 219. The ore deposits of Tonopah, Nevada (preliminary report), by J. E. Spurr. 1903. 31 pp., 1 pl. (Out of stock.)
- PP 20. A reconnaissance in northern Alaska in 1901, by F. C. Schrader. 1904. 139 pp., 16 pls.
- PP 21. The geology and ore deposits of the Bisbee quadrangle, Arizona, by F. L. Ransome. 1904. 168 pp., 29 pls.
- WS 90. Geology and water resources of part of the lower James River Valley, South Dakota, by J. E. Todd and C. M. Hall. 1904. 47 pp., 23 pls.
- PP 25. The copper deposits of the Encampment district, Wyoming, by A. C. Spencer. 1904. 107 pp., 2 pls.
- PP 26. Economic resources of northern Black Hills, by J. D. Irving, with chapters by S. F. Emmons and T. A. Jaggar, jr. 1904. 222 pp., 20 pls.*
- PP 27. Geological reconnaissance across the Bitterroot Range and the Clearwater Mountains in Montana and Idaho, by Waldemar Lindgren. 1904. 122 pp., 15 pls.
- PP 31. Preliminary report on the geology of the Arbuckle and Wichita mountains in Indian Territory and Oklahoma, by J. A. Taff, with an appendix on reported ore deposits in the Wichita Mountains, by H. F. Bain. 1904. 97 pp., 8 pls.
- B 235. A geological reconnaissance across the Cascade Range near the forty-ninth parallel, by G. O. Smith and F. C. Calkins. 1904. 103 pp., 4 pls.
- B 236. The Porcupine placer district, Alaska, by C. W. Wright. 1904. 35 pp., 10 pls.
- B 237. Igneous rocks of the Highwood Mountains, Montana, by L. V. Pirsson. 1904. 208 pp., 7 pls.
- B 238. Economic geology of the Iola quadrangle, Kansas, by G. I. Adams, Erasmus Haworth, and W. R. Crane. 1904. 83 pp., 1 pl.
- PP 32. Geology and underground water resources of the central Great Plains, by N. H. Darton. 1905. 433 pp., 72 pls. (Out of stock.)

WS 110. Contributions to hydrology of eastern United States, 1904; M. G. Fuller, geologist in charge.

B 242. Geology of the Hudson Valley between the Hoosic and the Kinderhook, by T. Nelson Dale. 1904. 63 pp., 3 pls.

PP 34. The Delavan lobe of the Lake Michigan glacier of the Wisconsin stage of glaciation and associated phenomena, by W. C. Alden. 1904. 106 pp., 15 pls.

PP 35. Geology of the Perry Basin in southeastern Maine, by G. O. Smith and David White. 1905. 107 pp., 6 pls.

B 243. Cement materials and industry of the United States, by E. C. Eckel. 1905. 395 pp., 15 pls.

B 246. Zinc and lead deposits of northwestern Illinois, by H. F. Bain. 1904. 56 pp., 5 pls.

B 247. The Fairhaven gold placers of Seward Peninsula, Alaska, by F. H. Moffit. 1905. 85 pp., 14 pls.

B 249. Limestones of southwestern Pennsylvania, by F. G. Clapp. 1905. 52 pp., 7 pls.

B 250. The petroleum fields of the Pacific coast of Alaska, with an account of the Bering River coal deposit, by G. C. Martin. 1905. 64 pp., 7 pls.

B 241. The gold placers of the Fortymile, Birch Creek, and Fairbanks regions, Alaska, by L. M. Prindle. 1905. 89 pp., 16 pls.

WS 118. Geology and water resources of a portion of east central Washington, by F. C. Calkins. 1905. 96 pp., 4 pls.

B 252. Preliminary report on the geology and water resources of central Oregon, by I. C. Russell. 1905. 138 pp., 24 pls.

PP 36. The lead, zine, and fluorspar deposits of western Kentucky, by E. O. Ulrich and W. S. Tangier Smith. 1905. 218 pp., 15 pls.

PP 38. Economic geology of the Bingham mining district of Utah, by J. M. Boutwell, with a chapter on areal geology, by Arthur Keith, and an introduction on general geology, by S. F. Emmons. 1905. 413 pp., 49 pls.

PP 41. The geology of the central Copper River region, Alaska, by W. C. Mendenhall. 1905. 133 pp., 20 pls.

B 254. Report of progress in the geological resurvey of the Cripple Creek district, Colorado, by Waldemar Lindgren and F. L. Ransome. 1904. 36 pp.

B 255. The fluorspar deposits of southern Illinois, by H. Foster Bain. 1905. 75 pp., 6 pls.

B 256. Mineral resources of the Elders Ridge quadrangle, Pennsylvania, by R. W. Stone. 1905. 86 pp., 12 pls.

B 257. Geology and paleontology of the Judith River beds, by T. W. Stanton and J. B. Hatcher, with a chapter on fossil plants, by F. H. Knowlton. 1905. 174 pp., 19 pls.

PP 42. Geology of the Tonopah mining district, Nevada, by J. E. Spurr. 1905. 295 pp., 23 pls.

WS 123. Geology and underground water conditions of the Jornada del Muerto, New Mexico, by C. R. Keyes. 1905. 42 pp., 9 pls.

WS 136. Underground waters of Salt River Valley, Arizona, by W. T. Lee. 1905. 194 pp., 24 pls.

PP 43. The copper deposits of the Clifton-Morenci district, Arizona, by Waldemar Lindgren. 1905. 375 pp., 25 pls.

B 265. Geology of the Boulder district, Colorado, by N. M. Fenneman. 1905. 101 pp., 5 pls.

B 267. The copper deposits of Missouri, by H. F. Bain and E. O. Ulrich. 1905. 52 pp., 1 pl.

PP 44. Underground water resources of Long Island, New York, by A. C. Veatch and others. 1905. 394 pp., 34 pls.

WS 148. Geology and water resources of Oklahoma, by C. N. Gould. 1905. 178 pp., 22 pls.

B 270. The configuration of the rock floor of Greater New York, by W. H. Hobbs. 1905. 96 pp., 5 pls. B 272. Taconic physiography, by T. N. Dale. 1905. 52 pp., 14 pls. (Out of stock.)

PP 45. The geography and geology of Alaska, a summary of existing knowledge, by A. H. Brooks, with a section on climate, by Cleveland Abbe, jr., and a topographic map and description thereof, by R. U. Goode. 1906. 327 pp., 34 pls.

B 273. The drumlins of southeastern Wisconsin (preliminary paper), by W. C. Alden. 1905. 46 pp., 9 pls.

PP 46. Geology and underground water resources of northern Louisiana and southern Arkansas, by A.C. Veatch. 1906.

PP 49. Geology and mineral resources of part of the Cumberland Gap coal field, Kentucky, by G. H.
Ashley and L. C. Glenn, in cooperation with the State Geological Department of Kentucky,
C. J. Norwood, curator. 1906. 239 pp., 40 pls.

PP 50. The Montana lobe of the Keewatin ice sheet, by F. H. H. Calhoun. 1906.

B 277. Mineral resources of Kenai Peninsula, Alaska: Gold fields of the Turnagain Arm region, by F. H. Moffit, and the coal fields of Kachemak Bay region, by R. W. Stone. 1906.

WS 154. The geology and water resources of the eastern portion of the Panhandle of Texas, by C. N. Gould. 1906. 64 pp., 15 pls.

B 278. Geology and coal resources of the Cape Lisburne region, Alaska, by A. J. Collier.

B 279. Mineral resources of the Kittanning and Rural Valley quadrangles, Pennsylvania, by Charles Butts.

B 280. The Rampart gold placer region, Alaska, by L. M. Prindle and F. L. Hess.

B 282. Oil fields of the Texas-Louisiana Gulf coastal plain, by N. M. Fenneman.

- WS 157. Underground water in the valleys of Utah Lake and Jordan River, Utah, by G. B. Richardson.
- PP 51. Geology of the Bighorn Mountains, by N. H. Darton:
- WS 158. Preliminary report on the geology and underground waters of the Roswell artesian area, New Mexico, by C. A. Fisher. 1906. 29 pp., 9 pls.

SERIES O-UNDERGROUND WATERS.

- WS 4. A reconnaissance in southeastern Washington, by I. C. Russell. 1897. 96 pp., 7 pls. (Out of stock.)
- WS 6. Underground waters of southwestern Kansas, by Erasmus Haworth. 1897. 65 pp., 12 pls. (Out of stock.)
- WS 7. Seepage waters of northern Utah, by Samuel Fortier. 1897. 50 pp., 3 pls. (Out of stock.)
- WS 12. Underground waters of southeastern Nebraska, by N. H. Darton. 1898. 56 pp., 21 pls. (Out of stock.)
- WS 21. Wells of northern Indiana, by Frank Leverett. 1899. 82 pp., 2 pls. (Out of stock.)
- WS 26. Wells of southern Indiana (continuation of No. 21), by Frank Leverett. 1899. 64 pp. (Out stock.)
- WS 30. Water resources of the Lower Peninsula of Michigan, by A. C. Lane. 1899. 97 pp., 7 pls. (Out of stock.)
- WS 31. Lower Michigan mineral waters, by A. C. Lane. 1899. 97 pp., 4 pls. (Out of stock.)
- WS 34. Geology and water resources of a portion of southeastern South Dakota, by J. E. Todd. 1900. 34 pp., 19 pls.
- WS 53. Geology and water resources of Nez Perces County, Idaho, Pt. I, by I. C. Russell. 1901. 86 pp., 10 pls. (Out of stock.)
- WS 54. Geology and water resources of Nez Perces County, Idaho, Pt. II, by I. C. Russell. 1901. 87–141 pp. (Out of stock.)
- WS 55. Geology and water resources of a portion of Yakima County, Wash., by G. O. Smith. 1901. 68 pp., 7 pls. (Out of stock.)
- WS 57. Preliminary list of deep borings in the United States, Pt. I, by N. H. Darton. 1902. 60 pp. (Out of stock.)
- WS 59. Development and application of water in southern California, Pt. I, by J. B. Lippincott. 1902. 95 pp., 11 pls. (Out of stock.)
- WS 60. Development and application of water in southern California, Pt. II, by J. B. Lippincott. 1902. 96-140 pp. (Out of stock.)
- WS 61. Preliminary list of deep borings in the United States, Pt. II, by N. H. Darton. 1902. 67 pp. (Out of stock.)
- WS 67. The motions of underground waters, by C. S. Slichter. 1902. 106 pp., 8 pls. (Out of stock.)
- B 199. Geology and water resources of the Snake River Plains of Idaho, by I. C. Russell. 1902. 192 pp., 25 pls.
- WS 77. Water resources of Molokai, Hawaiian Islands, by Waldemar Lindgren. 1903. 62 pp., 4 pls.
- WS 78. Preliminary report on artesian basin in southwestern Idaho and southeastern Oregon, by I. C. Russell. 1903. 53 pp., 2 pls.
- PP 17. Preliminary report on the geology and water resources of Nebraska west of the one hundred and third meridian, by N. H. Darton. 1903. 69 pp., 43 pls.
- WS 90. Geology and water resources of a part of the lower James River Valley, South Dakota, by J. E. Todd and C. M. Hall. 1904. 47 pp., 23 pls.
- WS 101. Underground waters of southern Louisiana, by G. D. Harris, with discussions of their uses for water supplies and for rice irrigation, by M. L. Fuller. 1904. 98 pp., 11 pls.
- WS 102. Contributions to the hydrology of eastern United States, 1903, by M. L. Fuller. 1904. 522 pp.
- WS 104. Underground waters of Gila Valley, Arizona, by W. T. Lee. 1904. 71 pp., 5 pls.
- WS 110. Contributions to the hydrology of eastern United States, 1904; M. L. Fuller, geologist in charge. 1904. 211 pp., 5 pls.
- PP 32. Geology and underground water resources of the central Great Plains, by N. H. Darton. 1904. 433 pp., 72 pls. (Out of stock.)
- WS 111. Preliminary report on underground waters of Washington, by Henry Landes. 1904. 85 pp.
- WS 112. Underflow tests in the drainage basin of Los Angeles River, by Homer Hamlin. 1904. 55 pp., 7 pls.
- WS 114. Underground waters of eastern United States; M. L. Fuller, geologist in charge. 1904. 285 pp., 18 pls.
- WS 118. Geology and water resources of east-central Washington, by F. C. Calkins. 1905. 96 pp.,
- B 252. Preliminary report on the geology and water resources of central Oregon, by I. C. Russell. 1905. 138 pp., 24 pls.
- WS 120. Bibliographic review and index of papers relating to underground waters published by the United States Geological Survey, 1879–1904, by M. L. Fuller. 1905. 128 pp.
- WS 122. Relation of the law to underground waters, by D. W. Johnson. 1905. 55 pp.

- WS 123. Geology and underground water conditions of the Jornada del Muerto, New Mexico, by C. R. Keyes. 1905. 42 pp., 9 pls.
- WS 136. Underground waters of the Salt River Valley, by W. T. Lee. 1905. 194 pp., 24 pls.
- B 264. Record of deep-well drilling for 1904, by M. L. Fuller, E. F. Lines, and A. C. Veatch. 1905. 106 pp.
- PP 44. Underground water resources of Long Island, New York, by A. C. Veatch and others. 1905. 394 pp., 34 pls.
- WS 137. Development of underground waters in the eastern coastal plain region of southern California, by W. C. Mendenhall. 1905. 140 pp., 7 pls.
- WS 138. Development of underground waters in the central coastal plain region of southern California, by W. C. Mendenhall. 1905. 162 pp., 5 pls.
- WS 139. Development of underground waters in the western coastal plain region of southern California, by W. C. Mendenhall. 1905. 105 pp., 7 pls.
- WS 140. Field measurements of the rate of movement of underground waters, by C. S. Slichter. 1905. 122 pp., 15 pls.
- WS 141. Observations on the ground waters of Rio Grande Valley, by C. S. Slichter. 1905. 83 pp., 5 pls.
- WS 142. Hydrology of San Bernardino Valley, California, by W. C. Mendenhall. 1905. 124 pp., 13 pls.
- WS 145. Contributions to the hydrology of eastern United States; M. L. Fuller, geologist in charge. 1905. 220 pp., 6 pls.
- WS 148. Geology and water resources of Oklahoma, by C. N. Gould. 1905. 178 pp., 22 pls.
- WS 149. Preliminary list of deep borings in the United States, second edition with additions, by N. H. Darton. 1905. 175 pp.
- PP 46. Geology and underground water resources of northern Louisiana and southern Arkansas, by A. C. Veatch. 1906.
- WS 153. The underflow in Arkansas Valley in western Kansas, by C. S. Slichter. 1966.
- WS 154. The geology and water resources of the eastern portion of the Panhandle of Texas, by C. N. Gould. 1906. 64 pp., 15 pls.
- WS 155. Fluctuations of the water level in wells, with special reference to Long Island, New York, by A. C. Veatch.
- WS 157. Underground water in the valleys of Utah Lake and Jordan River, Utah, by G. B. Richardson.
- WS 158. Preliminary report on the geology and underground waters of the Roswell artesian area, New Mexico, by C. A. Fisher. 1906. 29 pp., 9 pls.

The following papers also relate to this subject: Underground waters of Arkansas Valley in eastern Colorado, by G. K. Gilbert, in Seventeenth Annual, Pt. II; Preliminary report on artesian waters of a portion of the Dakotas, by N. H. Darton, in Seventeenth Annual, Pt. II; Water resources of Illinois, by Frank Leverett, in Seventeenth Annual, Pt. II; Water resources of Indiana and Ohio, by Frank Leverett, in Eighteenth Annual, Pt. IV; New developments in well boring and irrigation in eastern South Dakota, by N. H. Darton, in Eighteenth Annual, Pt. IV; Rock waters of Ohio, by Edward Orton, in Nineteenth Annual, Pt. IV; Artesian well prospects in the Atlantic coastal plain region, by N. H. Darton, Bulletin No. 138.

 \bigcirc

Correspondence should be addressed to

THE DIRECTOR

UNITED STATES GEOLOGICAL SURVEY,

April, 1906.

Washington, D. C.

JUL 190 19r.

I Mr '08

